


# PACSystems™ RX3i

## IC694MDL660

GFK-2379  
March 2005

### 24VDC 32-Point Positive/Negative Logic Input Module

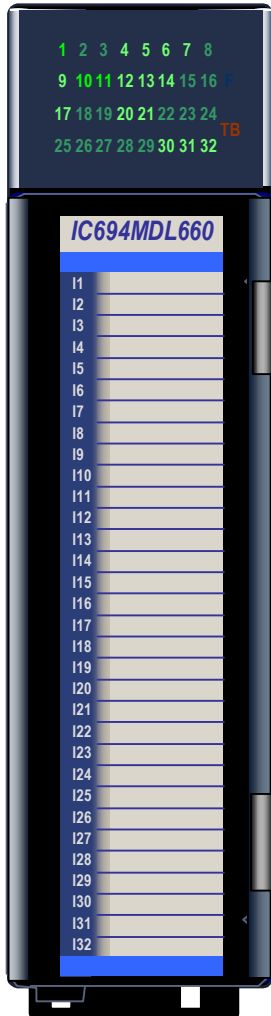

The **24 VDC Positive/Negative Logic Input** module, IC694MDL660, provides 32 discrete input points. The inputs are positive or negative logic inputs and will operate at levels up to 30V.

The inputs are arranged in four isolated groups of eight; each group has its own common. Isolation is provided between the four groups of inputs, however each group of eight inputs is referenced to the same user common connection.

Module MDL660 provides seven selectable input filter times. Filter times can be set from the programmer using the module's assigned output data references.

This module can be used with either a Box-style (IC694TBB032) or Spring-style (IC694TBS032) front Terminal Block. The Terminal Block is ordered separately.

32 green LEDs indicate the ON/OFF status of points 1 through 32. The red/green TB LED is green when the module's removable terminal block is locked in place. It is red when the terminal block is not locked. The module also sends an *Addition of Terminal Block* or *Loss of Terminal Block* message to the RX3i CPU to report the terminal block status.

The blue bands on the label show that MDL660 is a low-voltage module.

This module can be installed in any I/O slot in an RX3i system. It must be used with an RX3i CPU (release 2.90 or greater). It cannot be used with a Series 90-30 PLC CPU.

Module MDL660 uses 48 input bits and 16 output bits to exchange point status and filter information with the RX3i CPU.

## ***Release Information***

### ***Release History***

| <b><i>Release</i></b> | <b><i>Comments</i></b> |
|-----------------------|------------------------|
| IC694MDL660A          | Initial Release        |

### ***Known Restrictions and Open Issues in this Release***

1. Problem: If the module has corrupted or missing firmware (its LEDs will be OFF), it may still be scanned by the CPU, and there may be no fault messages to indicate that the module is not operating.

Recommendation: In critical control applications, do not rely solely on diagnostic fault messaging to provide notification of module inoperability.

2. Problem: Firmware updates may fail before they are completed, leaving the module in a “lights out” condition.

Recommendation: Cycle power to the module and try the firmware update again.

3. Problem: Rarely, hot insertion/removal of the MDL660A module triggers a Loss/Addition of Terminal Block fault message.

Recommendation: If the terminal block is present and locked, ignore the Loss/Addition of Terminal Block fault message.

4. Problem: Rarely, after a period of many rapidly-repeated power cycles, the module may go “lights out”.

Recommendation: Avoid multiple power cycles of periods less than 1 second. Also, avoid relay-switching of power to PLC. (Relays can bounce creating rapid power cycling).

**Specifications: IC694MDL660**

|                                                |                                                                              |
|------------------------------------------------|------------------------------------------------------------------------------|
| <b>Rated Voltage</b>                           | 24 volts DC                                                                  |
| <b>Input Voltage Range</b>                     | 0 to 30 volts DC                                                             |
| <b>Inputs per Module</b>                       | 32 (four isolated groups of 8 inputs)                                        |
| <b>Isolation, Field to Backplane (optical)</b> | 250 VAC continuous;<br>1500 VAC for one minute                               |
| <b>Isolation, Group to Group</b>               | 250VAC continuous;<br>1500 VAC for one minute                                |
| <b>Input Current</b>                           | 7.0 mA per point (typical) at rated voltage                                  |
| <b>Module ID</b>                               | 0x058h                                                                       |
| <b>Input Characteristics:</b>                  |                                                                              |
| <b>On-state Voltage</b>                        | 11.5 to 30 VDC                                                               |
| <b>Off-state Voltage</b>                       | 0 to 5 VDC                                                                   |
| <b>On-state Current</b>                        | 3.2mA minimum                                                                |
| <b>Off-state Current</b>                       | 1.1mA maximum                                                                |
| <b>Input Filter Times</b>                      | 0.5ms, 1.0ms, 2.0ms, 5ms, 10ms, 50ms and 100ms, selectable per module        |
| On response Time                               | 0.5ms, 1.0ms, 2.0ms, 5.0ms, 10.0ms, 50.0ms & 100.0ms (as per filter setting) |
| Off response Time                              | 0.5ms, 1.0ms, 2.0ms, 5.0ms, 10.0ms, 50.0ms & 100.0ms (as per filter setting) |
| <b>Power Consumption</b>                       | 300mA (all inputs on) from 5 volt bus on backplane                           |
| <b>Diagnostics</b>                             | Terminal block presence reported to RX3i CPU                                 |

**Field Wiring: MDL660**

| <b>Connections</b> | <b>Terminals</b> | <b>Terminals</b> | <b>Connections</b> |
|--------------------|------------------|------------------|--------------------|
| Input 1            | 1                | 19               | Input 17           |
| Input 2            | 2                | 20               | Input 18           |
| Input 3            | 3                | 21               | Input 19           |
| Input 4            | 4                | 22               | Input 20           |
| Input 5            | 5                | 23               | Input 21           |
| Input 6            | 6                | 24               | Input 22           |
| Input 7            | 7                | 25               | Input 23           |
| Input 8            | 8                | 26               | Input 24           |
| Common 1 - 8       | 9                | 27               | Common 17 - 24     |
| Input 9            | 10               | 28               | Input 25           |
| Input 10           | 11               | 29               | Input 26           |
| Input 11           | 12               | 30               | Input 27           |
| Input 12           | 13               | 31               | Input 28           |
| Input 13           | 14               | 32               | Input 29           |
| Input 14           | 15               | 33               | Input 30           |
| Input 15           | 16               | 34               | Input 31           |
| Input 16           | 17               | 35               | Input 32           |
| Common 9 - 16      | 18               | 36               | Common 25 - 32     |

