


DATA SHEET

Vibro-Meter®

**VM600 MPC4**  
**machinery protection**  
**card**

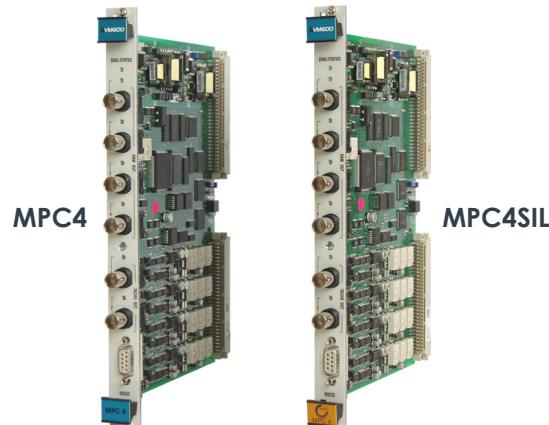

**KEY FEATURES AND BENEFITS**

- From the Vibro-Meter® product line
- Continuously online machinery protection card
- Real-time measurement and monitoring using state-of-the-art DSP techniques
- 4 dynamic signal channels and 2 tachometer (speed) channels, all individually programmable
- Programmable broad-band and narrow-band filters
- Simultaneous amplitude and phase monitoring in order-tracking mode
- Programmable Alert, Danger and OK set points
- Adaptive Alert and Danger levels
- Front-panel BNC connectors for easy analysis of buffered "raw" sensor signals
- Front-panel LEDs indicate status and alarms

**KEY BENEFITS AND FEATURES (continued)**

- Integrated power supplies for sensors and signal conditioners such as IEPE accelerometers and proximity measurement systems
- Live insertion and removal of cards (hot-swappable)
- Available in "standard", "separate circuits" and "safety" (SIL) versions

**APPLICATIONS**

- Machinery protection and/or basic condition monitoring



Information contained in this document may be subject to export control regulations of the European Union, USA or other countries. Each recipient of this document is responsible for ensuring that transfer or use of any information contained in this document complies with all relevant export control regulations. ECN N/A.

## DESCRIPTION

### MPC4 card

The MPC4 machinery protection card is the central element in the VM600 series machinery protection system (MPS), from Meggitt's Vibro-Meter® product line. This very versatile card is capable of measuring and monitoring up to four dynamic signal inputs and up to two speed inputs simultaneously.

The dynamic signal inputs are fully programmable and can accept signals representing acceleration, velocity and displacement (proximity), among others. On-board multi-channel processing allows measurement of various physical parameters, including relative and absolute vibration,  $S_{max}$ , eccentricity, thrust position, absolute and differential housing expansion, displacement and dynamic pressure.

Digital processing includes digital filtering, integration or differentiation (if required), rectification (RMS, mean value, true peak or true peak-to-peak), order tracking (amplitude and phase) and measurement of the sensor-target gap.

The speed (tachometer) inputs accept signals from a variety of speed sensors, including systems based on proximity probes, magnetic pulse pick-up sensors or TTL signals. Fractional tachometer ratios are also supported.

The configuration can be expressed in metric or imperial units. Alert and Danger set points are fully programmable, as are alarm time delay, hysteresis and latching. The Alert and Danger levels can also be adapted as a function of the speed or any external information.

A digital output is available internally (on the corresponding IOC4T input/output card) for each alarm level. These alarm signals can drive four local relays on the IOC4T card and/or can be routed using the VM600 rack's Raw bus or Open Collector (OC) bus to drive relays on optional relay cards such as the RLC16 or IRC4.

The processed dynamic (vibration) signals and speed signals are available at the rear of the rack (on the front panel of the IOC4T) as analog output signals. Voltage-based (0 to 10 V) and current-based (4 to 20 mA) signals are provided.

The MPC4 performs a self-test and diagnostic routine on power-up. In addition, the card's built-in "OK system" continuously monitors the level of signals provided by a measurement chain (sensor and/or signal conditioner) and indicates any problem due to a broken transmission line, faulty sensor or signal conditioner.

An LED indicator on the MPC4 front panel indicates whether a processing or hardware error has occurred. Six additional LEDs (one per input channel) indicate whether the OK System has detected a fault and whether an alarm has occurred on the channel.

The MPC4 card is available in three versions: a "standard" version, a "separate circuits" version and a "safety" (SIL) version, all of which function as a card pair using a corresponding IOC4T input/output card.

### Different versions of the MPC4 card

The MPC4 card is available in different versions, including "standard", "separate circuits" and "safety" (SIL) versions. In addition, some versions are available with a conformal coating applied to the circuitry of the card for additional environmental protection against chemicals, dust, moisture and temperature extremes.

Both the 'standard' version and the "safety" (SIL) versions of the MPC4 card are certified to IEC 61508 and ISO 13849, for use in functional safety contexts, such as SIL 1 in accordance with IEC 61508 and PL c in accordance with ISO 13849-1.

The "standard" MPC4 card is the original version and supports all features and processing modes. The "standard" MPC4 is intended for safety systems using a VM600 rack with a limited range of cards, that is, "standard" MPC4/IOC4T card pairs and RLC16 relay cards. It has a VME-compatible slave interface so it is software configurable via VME when there is a CPUx card acting as a rack controller in the VM600 rack. It is also software configurable via RS-232 (on the front panel of the card).

## DESCRIPTION (continued)

The “safety” (SIL) MPC4 card, known as the MPC4SIL, was developed to permit a wider range of installation options. Specifically, VM600 racks that also contain condition monitoring cards such as the XMx16 and relay cards such as the IRC4. To safety certify these configurations, it was necessary to ensure that the MPC4SIL is isolated from the other cards in a VM600 rack, so that there is no possibility of its configuration being inadvertently modified.

Therefore, the MPC4SIL card does not include a VME-compatible slave interface, does not support the tachometer (speed) channels and does not provide all of the signal processing capabilities of the “standard” MPC4 card (see **Additional specifications – for “standard” and “separate circuits” MPC4 cards only on page 9**).

### Segregation of MPS and CMS

The VM600 rack, machinery protection cards, condition monitoring cards and associated software are designed for compliance with the machinery protection system (MPS) and condition monitoring system (CMS) segregation requirements of the API 670 standard, which ensures that the functionality of the MPS does not depend on and is not compromised in any way by the operation of the CMS.

So although machinery protection cards and condition monitoring cards can easily share sensor signals from measurement chains, MPC4/IOC4T card pairs do not share any communication buses with XMx16/XIO16T condition monitoring card pairs in a VM600 rack, and MPC4/IOC4T card pairs are configured and operated using the VM600 MPSx software (while XMx16/XIO16T card pairs are configured and operated using the VibroSight® software).

### Applications information

When used as a card pair with an IOC4T input/output card, the MPC4 is highly suitable for machinery monitoring and protection in a wide range of industrial applications.

For further information on the use of MPC4/IOC4T card pairs in general, refer to the *VM600 machinery protection system (MPS) hardware manual* and the *VM600 MPSx software manuals*. For information on the use of MPC4/IOC4T card pairs in functional safety contexts, refer to the refer to the *VM600 functional safety manual*.

For specific applications, contact your local Meggitt representative.

## SPECIFICATIONS – COMMON TO ALL MPC4 CARDS

### Dynamic signal inputs

Number of inputs	: 4 per MPC4 card
DC range	: 0 to +20 V or 0 to -20 V
AC range	: $\pm 10$ V max.
Common mode voltage range	: -50 to +50 V
CMRR	: >60 dB at 50 Hz
Crosstalk	: -72 dB
Input impedance	: 200 k $\Omega$
Current input range	
• DC signals	: 0 to 25 mA
• AC signals	: $\pm 8$ mA max.
Analog frequency range	: DC to 60 kHz (-3 dB). Note: Applicable when dynamic signal outputs are shared using the Raw bus (VM600 rack). Dynamic signal outputs can be shared with XMx16/XIO16T card pairs but cannot be shared with other MPC4/IOC4T card pairs.
Analog AC frequency range	
• Without integration	: 0.1 Hz to 10 kHz
• With integration	: 2.5 Hz to 10 kHz
Current measuring resistor	: 324.5 $\Omega$

### Buffered dynamic signal outputs

The buffered "raw" dynamic signal outputs are available on the front-panel BNC connectors (MPC4 card) and the screw-terminal connectors (IOC4T card).

Output impedance	: 50 $\Omega$
Analog frequency range	: DC to 10 kHz (-0.1 dB with a load >1 M $\Omega$ ). DC to 10 kHz (-0.2 dB with a load >200 k $\Omega$ ). DC to 40 kHz (-3 dB). Note: Applicable when buffered "raw" dynamic signal outputs are shared using the front-panel BNC connectors (VM600 MPC4 card) and the screw-terminal connectors (VM600 IOC4T card).
Phase error	: <5° (DC to 1 kHz). <30° (DC to 10 kHz).
Transfer ratio	
• Voltage input	: 1 V/V
• Current input	: 0.3245 V/mA

### Speed / phase reference inputs and outputs

See **Additional specifications – for "standard" and "separate circuits" MPC4 cards only on page 9**.

The "standard" and "separate circuits" versions of the MPC4 card support speed/phase reference inputs and buffered speed/phase reference outputs but the "safety" version of the card (MPC4SIL) does not.

### Discrete signal interface (DSI) inputs

Discrete signal interface (DSI) control signal inputs are available on the associated IOC4T card. Refer to the IOC4T input/output card data sheet for further information.

## SPECIFICATIONS – COMMON TO ALL MPC4 CARDS (continued)

### Analog (DC) outputs and discrete outputs

Analog (DC) outputs and discrete outputs (relays) are available on the associated IOC4T card. Refer to the IOC4T input/output card data sheet for further information.

### Measurement chain OK check (OK system)

Number of levels	: Two configurable threshold levels (upper and lower)
OK level range	
• Voltage inputs	: $\pm 20$ V <sub>DC</sub>
• Current inputs	: 0 to 23 mA
Operating principle	
• Powered sensors	: Line-fault detection of conditions such as open-circuit or short-circuit
• Unpowered sensors	: Line-fault detection of conditions such as open-circuit

### Processing functions

#### Broad-band processing

Filtering options	: High-pass, low-pass or band-pass
LP / HP ratio in pass band	: 500 max.
Ripple	: $\pm 0.3$ dB
Slope	: 6 to 60 dB/octave (software configurable)
Attenuation outside pass band	: >50 dB
Amplitude accuracy	: $\pm 1\%$ of full-scale
Linearity error	: $<\pm 1\%$
Equivalent input noise (without integration)	: <200 $\mu$ V RMS

#### Narrow-band (tracking) processing

See **Additional specifications – for “standard” and “separate circuits” MPC4 cards only on page 9.**

The “standard” and “separate circuits” versions of the MPC4 card support narrow-band tracking but the “safety” version of the card (MPC4SIL) does not.

#### Relative shaft vibration processing

Frequency range	
• Vibration	: 0.1 Hz to 10 kHz
• Gap/position	: DC to 1 Hz
Amplitude accuracy	
• Vibration	: $\pm 1\%$ of full-scale
• Gap/position	: $\pm 1\%$ of full-scale
• Linearity error	: $<\pm 1\%$
Initial gap/offset compensation	: Available

## SPECIFICATIONS – COMMON TO ALL MPC4 CARDS (continued)

### Alarm processing and combination

#### Level detectors

- Vibration systems
- Accelerometer systems
- Speed channel

#### Alarm scanning interval

#### Alarm level value

#### Hysteresis

#### Latching

#### Alarm delay time

#### Alarm outputs

#### Adaptive monitoring

#### Adaptation criteria (for adaptive monitoring)

#### Logical combinations

#### Number of logical combinations

: Over-level switching (A+, D+) and under-level switching (A-, D-)

: Over-level switching (A+, D+)

: 2 Alert levels (A-, A+)

: 100 ms max.

: User-programmable within range

: User-programmable within range

: User-programmable within range

: User-programmable within range

: Individual alarms and common alarms (open-collector transistor)

: Adaptive monitoring uses a control parameter (such as speed) to multiply the configured alarm limits by multiple coefficients configured for different ranges of the control parameter.  
Trip multiplier uses the DSI TM control signal to multiply the configured alarm limits by a single configurable coefficient.

: Speed or digital input

: AND, OR and majority voting logic

: 8 basic functions and 4 advanced functions

### Environmental

#### Temperature

- Operating
- Storage

: -25 to 65°C (-13 to 149°F)

: -40 to 85°C (-40 to 185°F)

#### Humidity

- Operating
- Storage

: 0 to 90% non-condensing

: 0 to 95% non-condensing

### Approvals

#### Conformity ("standard" and "safety" versions)

: CE marking, European Union (EU) declaration of conformity.  
EAC marking, Eurasian Customs Union (EACU) certificate / declaration of conformity.

: IEC/EN 61000-6-2 and IEC/EN 61000-6-4.  
TR CU 020/2011.

: IEC/EN 61010-1.  
TR CU 004/2011.

: IEC 60255-21-1 (Class 2)

: Separate circuits according to IEC 60255-5 for the "separate circuits" version of the MPC4

: SIL 1 according to IEC 61508 for the "safety" version of the MPC4

: RoHS compliant

: Pattern approval certificate CH.C.28.004.A N° 60224

#### Electromagnetic compatibility

#### Electrical safety

#### Vibration

#### Insulation coordination for measuring relays and protection equipment

#### Safety integrity level

#### Environmental management

#### Russian federal agency for technical regulation and metrology (Rosstandart)

## SPECIFICATIONS – COMMON TO ALL MPC4 CARDS (continued)

### Communications

VME bus	: A24/D16 slave mode
RS-232 port	: Configuration and communications port, proprietary protocol (see <b>Connectors on page 8</b> )
MPC4 to IOC4T bus	: Similar to industry pack (IP)

Note: The VME bus provides access to the MPC4/IOC4T card pair via a CPUx card, in order to support Ethernet and/or fieldbus communications. The RS-232 port (front-panel serial interface) provides access to the MPC4/IOC4T card pair for standalone operation, that is, when a CPUx card is not installed in the VM600 rack. An MPC4/IOC4T card pair is software configurable via VME or RS-232 (see **Configuration on page 7**).

Note: The “standard” and “separate circuits” versions of the MPC4 card include a VME bus but the “safety” version of the card (MPC4SIL) does not. Therefore, the “standard” and “separate circuits” versions of the MPC4 card are software configurable via RS-232 or VME but the MPC4SIL card is software configurable via RS-232 only.

### Configuration

MPC4/IOC4T card pair	: Software configurable via an RS-232 or Ethernet connection, using a computer running the VM600 MPSx software. Hardware configurable using jumpers on the MPC4/IOC4T card pair.
----------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Note: Configuration via an Ethernet connection requires a CPUx card acting as a rack controller in the VM600 rack.

### Status indicators (LEDs)

DIAG/STATUS	: One multicolour (green/yellow/red) LED used to indicate the status of the MPC4/IOC4T card pair, such as normal operation, configuration status or internal hardware or firmware failures
RAW OUT 1 to 4	: Four multicolour (green/yellow/red) LED used to indicate the status of the individual dynamic channels
TACHO OUT 1 to 2	: Two multicolour (green/yellow) LED used to indicate the status of the individual tachometer (speed) channels

### Power supply to card (input)

Power source	: VM600 rack power supply
Supply voltages	: $+5\text{ V}_{\text{DC}}$ and $\pm 12\text{ V}_{\text{DC}}$
Consumption from $+5\text{ V}_{\text{DC}}$ supply	: 12.5 W typ., plus an additional 1 W per sensor used
Consumption from $\pm 12\text{ V}_{\text{DC}}$ supply	: 2.5 W max.

### Power supply to sensors (output)

Voltage power supply	: $+27.2\text{ V} \pm 5\%$ in the range 0 to 25 mA. $-27.2\text{ V} \pm 5\%$ in the range 0 to 25 mA. $+15.0\text{ V} \pm 5\%$ in the range 0 to 25 mA.
Current power supply	: $6.16\text{ mA} \pm 5\%$ in the range 1 to 23 V
Over-current protection (on-board)	: 11.0 A on $+5\text{ V}$ line

## SPECIFICATIONS – COMMON TO ALL MPC4 CARDS (continued)

### Connectors

RAW OUT 1	: BNC connector (female). Buffered “raw” sensor output (analog signal) for dynamic measurement channel 1.
RAW OUT 2	: BNC connector (female). Buffered “raw” sensor output (analog signal) for dynamic measurement channel 2.
RAW OUT 3	: BNC connector (female). Buffered “raw” sensor output (analog signal) for dynamic measurement channel 3.
RAW OUT 4	: BNC connector (female). Buffered “raw” sensor output (analog signal) for dynamic measurement channel 4.
TACHO OUT 1	: BNC connector (female). Buffered “raw” sensor output (digital signal) for tachometer (speed) channel 1.
TACHO OUT 2	: BNC connector (female). Buffered “raw” sensor output (digital signal) for tachometer (speed) channel 2.
RS232	: 9-pin D-sub connector (DCE), female. Serial connection for communication between the MPC4/IOC4T card pair and a computer running the VM600 MPSx software. Note: The RS232 connector allows a connection to a host computer using a standard serial cable.

### Physical

Height	: 6U (262 mm, 10.3 in)
Width	: 20 mm (0.8 in)
Depth	: 187 mm (7.4 in)
Weight	: 0.40 kg (0.88 lb) approx.