

330505 Low Frequency Velocity Sensor

Datasheet

Bently Nevada Machinery Condition Monitoring

169872 Rev. F



Description

The Bently Nevada 330505 Low Frequency Velocity Sensor is specifically designed for hydroelectric turbines where slow rotating speeds require detecting a low signal to noise ratio. It detects vibration of the stator core, stator frame, and bearing housing supports. It is designed to provide early warning of pending machinery problems and to help you diagnose problems before they become serious.

The sensor measures absolute vibration within the 0.5Hz to 1.0kHz range. Its two-wire design uses moving-coil technology and embedded signal conditioning circuitry to provide a voltage output directly proportional to the vibration velocity.

Stator core and stator frame vibration can cause fretting and damage to the winding insulation. To detect these problems before serious damage occurs, mount a 330505 sensor on the outer diameter of the stator core and frame.

Bearing housing vibration can distort levels of vibration measured by shaft-observing proximity probes. To detect premature failure of machine components and prevent significant machine problems, place 330505 sensors in locations that measure both shaft-relative and bearing-absolute vibration signals. You can mount 330505 sensors to the bearing housing either as a stand-alone measurement or in the same orientation as existing proximity sensors.

The 330505 Transducer connects to the 3500/46M Hydro Monitor, meeting the requirements of International Organization for Standardization (ISO) Standard 10816-5 for mechanical vibration on non-rotating parts in hydraulic power and pumping plants.

Due to the nature of high amplitude, low frequency velocity events, the 330505 Low Frequency Velocity Sensor is not recommended for automated machinery protection. Due to capacitance constraints, this sensor is not approved for hazardous areas.

CE

Cable Part Numbers

Part number	Description
† NOTE: Use 'AA' in the part numbers below to specify the length (in feet) of the cable you want to order.	
02173034	<p>Splash-Proof Interconnect Cable</p> <p>Recommended for high electromagnetic noise environment and European Conformance (CE).</p> <p>Shielded 0.382 mm² (22 AWG) cable with a splash proof boot over a female connector at the transducer end and flush cut at the monitor end. Temperature range -55 to 125°C (-67 to 257°F). See Graphs and Figures.</p>
CB2W100-AAA†	<p>Splash-Proof Interconnect Cable</p> <p>Shielded 0.382 mm² (22 AWG) cable with splash proof over molded boot, blunt cut at the monitor end. Temperature range -50 to 200°C (-58 to 392°F). See Graphs and Figures.</p> <p>Standard lengths:</p> <ul style="list-style-type: none"> 01515 ft (4.5 m) 03232 ft (9.8 m) 06464 ft (19.5 m) 112112 ft (34.1 m) 125125 ft (38.1 m) 150150 ft (45.7 m) 200200 ft (61.09 m)

Part number	Description
9571-AA†	Standard Interconnect Cable
84661-AA†	<p>Shielded 0.382 mm² (22 AWG) cable with a moisture resistant female connector at the transducer end and ring lugs at the monitor end. Temperature range -29 to 121°C (-20 to 250°F). See Graphs and Figures.</p> <p>Minimum length 2 ft (0.60 m); maximum length 99 ft (30 m).</p>
89477-AA†	<p>Standard Armored Interconnect Cable</p> <p>Stainless steel armor over shielded 0.382 mm² (22 AWG) cable with a moisture resistant female connector at the transducer end and ring lugs at the monitor end. Temperature range -29 to 121°C (-20 to 250°F). See Graphs and Figures.</p> <p>Minimum length 3 ft (0.91 m); maximum length 96 ft (29 m).</p>
	<p>Right Angle Interconnect Cable</p> <p>Shielded 0.963 mm² (18 AWG) cable with a moisture resistant right angle female connector at the transducer end and ring lugs at the monitor end. Temperature range -29 to 121°C (-20 to 250°F). See Graphs and Figures.</p>

Part number	Description	Part number	Description
	Minimum length 2 ft (0.6 m); maximum length 99 ft (30 m).		Right angle connector kit. Same connector as used on 89477-AA.
122129-AA†	<p>Short Run Interconnect Cable</p> <p>Shielded 0.963 mm² (18 AWG) cable with a moisture resistant female connector at the transducer end and ring lugs at the monitor end. Temperature range -29 to 121°C (-20 to 250°F). See Graphs and Figures.</p> <p>Minimum length 6 in (152 mm); maximum length 24 in (610mm).</p>		
02173006	<p>0.963 mm² (18 AWG) Bulk Cable</p> <p>Shielded twisted pair. Same cable as used on 89477-AA and 122129-AA. Specify number of feet.</p>		
02173007	<p>0.382 mm² (22 AWG) Bulk Cable</p> <p>Shielded twisted pair. Same cable as used on 9571-AA and 84661-AA. Specify the number of feet. The maximum length that should be used with the transducer is 305 m (1000 ft)</p>		
00502025	<p>Spare Connector</p> <p>Same connector as used on 9571-AA and 84661-AA</p>		
101212-01	Right Angle Connector		

Graphs and Figures

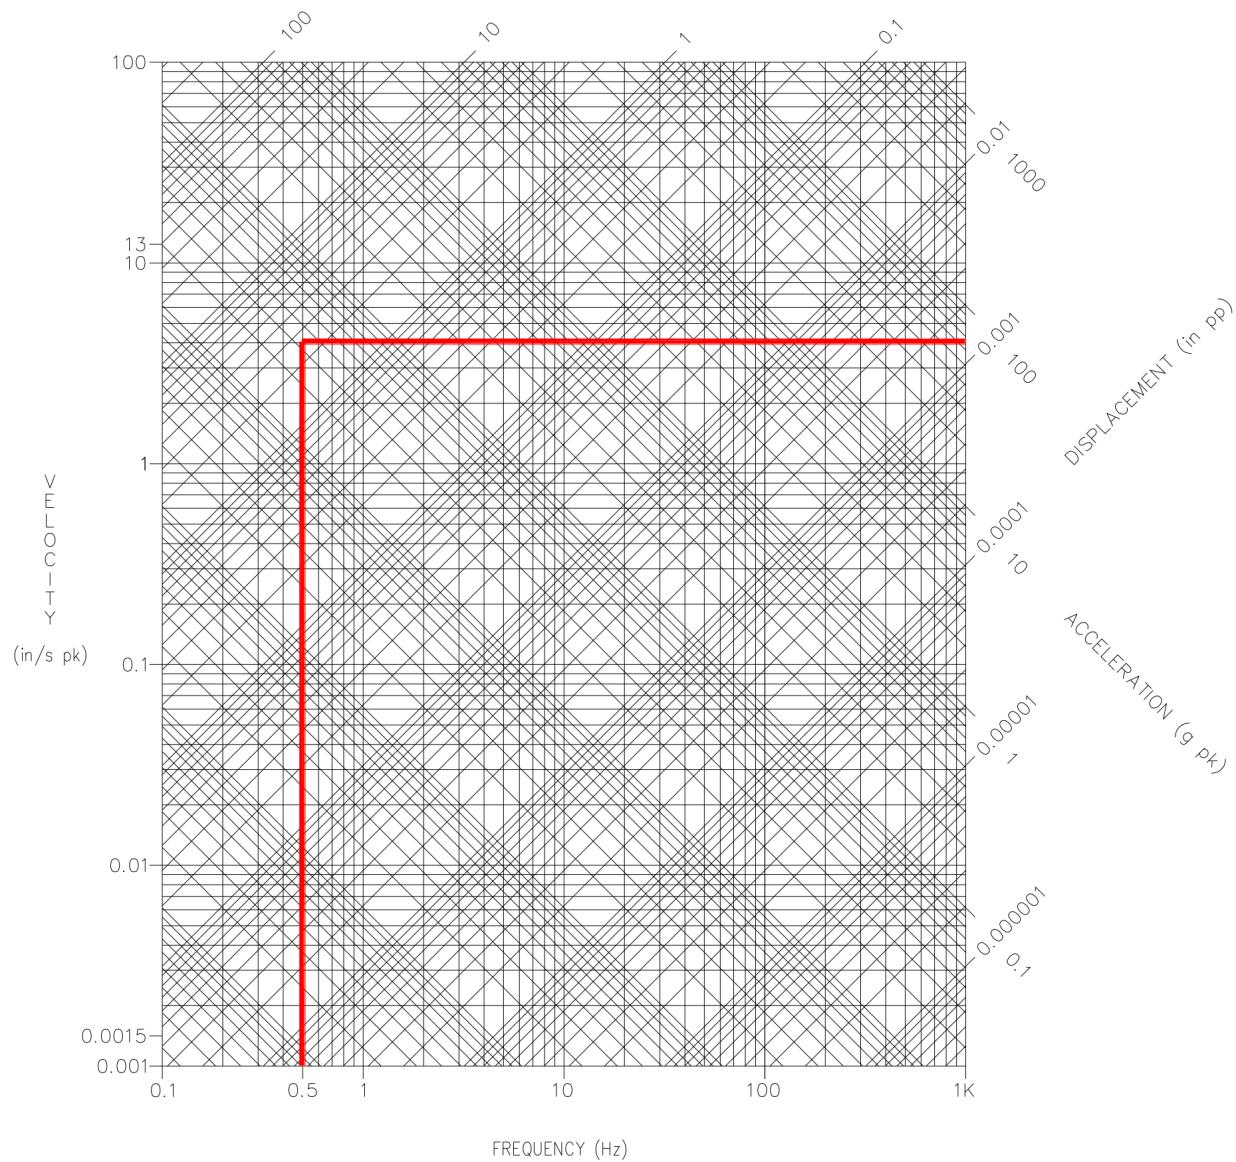


Figure 1: 330505 Vibration Nomograph

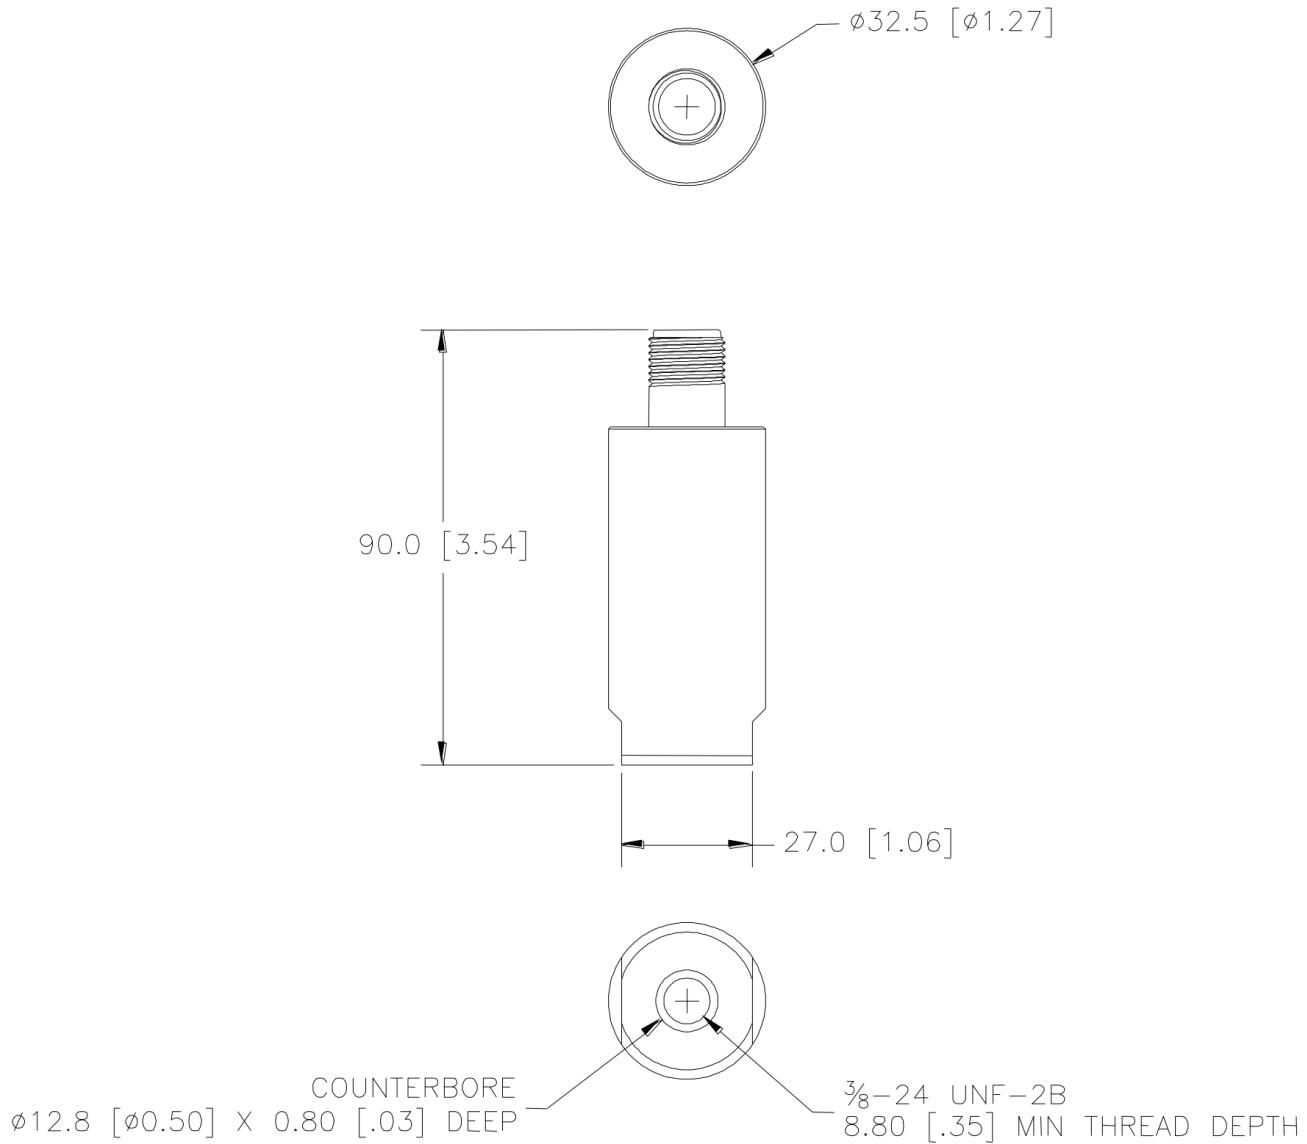


Figure 2: 330505 System Dimensional Drawing

(Dimensions are in millimeters [inches].)