

# Trusted TMR I/O SmartSlot Slot Cables

## Product Overview

This document provides detailed information for the types of Trusted® input/output (I/O) Cables available within the SmartSlot group. These types of cable provide connection facilities between the Trusted analogue and digital input/output modules, and Trusted Field Termination Assemblies (FTAs) or Trusted Versatile Field Termination Assemblies (VFTAs) as required. Cables are also available with a 'flying lead' at one end to allow connection to conditioned terminals.

The types of Trusted I/O SmartSlot Cables currently available are listed in Table 1 on page 4.

The cables are manufactured to user's requirements, therefore length and type of cable insulation must be specified. Length must be specified to the nearest 0.5 m in the format xmx, e.g. 2m0 for a cable length of 2.0 m. This detail must be added to the end of the part number. Note that some cable lengths are preferred options and may be easier to obtain; refer to Rockwell Automation for details. The type of cable insulation forms part of the cable part number and is denoted by 02 for Low Smoke Zero Halogen (LSZH) or 03 for UL Certified cable material. 02 is also flame retardant to IEC 60332-3 Cat A. When ordering cables, it is recommended that the user supplies the details as shown in Table 1.

The maximum recommended I/O cable length is 15 m. Cables longer than this may be specified if necessary but may suffer from voltage drop, offset, crosstalk and noise and will present materials handling problems.

Internal cables are designed for cables where they are terminated in adjacent enclosures. If the cable needs to leave the enclosure environment, the external cable has more protection. Note that the 'external' cables are not armoured and are not suitable for truly external use and must still be treated with care. These cables will need protection when drawn through a cable route, and should also not be pulled by the connector(s). They should enter cabinets through transit/compression blocks and cannot be glanded.

The SmartSlot cables described in this document allow hot-swap modules to be sited in separated slots as required, linked with a SmartSlot jumper cable. For Companion Slot cables, allowing hot-swap modules to be sited in adjacent slots using a double width chassis socket, refer to Trusted I/O Companion Slot Cables, publication [ICSTT-RM311](#) (PD-TC200).

# 1. SmartSlot Cable Types and Selection Guides

The types of Trusted I/O SmartSlot Cables currently available are listed in Table 1 below


| Cable Type    | Description                                                                 |
|---------------|-----------------------------------------------------------------------------|
| TC-501-02-xmx | I/O SmartSlot V2 Internal 40 Channel Input to FTA                           |
| TC-501-03-xmx | I/O SmartSlot V2 Internal 40 Channel Input to FTA (UL)                      |
| TC-502-02-xmx | I/O SmartSlot V2 Internal 40 Channel Input to Flying Lead / Free Wire       |
| TC-502-03-xmx | I/O SmartSlot V2 Internal 40 Channel Input to Flying Lead / Free Wire (UL)  |
| TC-503-02-xmx | I/O SmartSlot V2 External 40 Channel Input to FTA                           |
| TC-503-03-xmx | I/O SmartSlot V2 External 40 Channel Input to FTA (UL)                      |
| TC-504-02-xmx | I/O SmartSlot V2 External 40 Channel Input to Flying Lead / Free Wire       |
| TC-504-03-xmx | I/O SmartSlot V2 External 40 Channel Input to Flying Lead / Free Wire (UL)  |
| TC-505-02-xmx | I/O SmartSlot V2 Internal 40 Channel Output to FTA                          |
| TC-505-03-xmx | I/O SmartSlot V2 Internal 40 Channel Output to FTA (UL)                     |
| TC-506-02-xmx | I/O SmartSlot V2 Internal 40 Channel Output to Flying Lead / Free Wire      |
| TC-506-03-xmx | I/O SmartSlot V2 Internal 40 Channel Output to Flying Lead / Free Wire (UL) |
| TC-507-02-xmx | I/O SmartSlot V2 External 40 Channel Output to FTA                          |
| TC-507-03-xmx | I/O SmartSlot V2 External 40 Channel Output to FTA (UL)                     |
| TC-508-02-xmx | I/O SmartSlot V2 External 40 Channel Output to Flying Lead / Free Wire      |
| TC-508-03-xmx | I/O SmartSlot V2 External 40 Channel Output to Flying Lead / Free Wire (UL) |
| TC-509-02-xmx | I/O SmartSlot V2 Internal 40 Channel Output to VFTA                         |
| TC-509-03-xmx | I/O SmartSlot V2 Internal 40 Channel Output to VFTA (UL)                    |
| TC-510-02-xmx | I/O SmartSlot V2 External 40 Channel Output to VFTA                         |
| TC-510-03-xmx | I/O SmartSlot V2 External 40 Channel Output to VFTA (UL)                    |
| TC-511-02-xmx | I/O SmartSlot V2 Internal 40 Channel Input to VFTA                          |

| Cable Type    | Description                                                                                  |
|---------------|----------------------------------------------------------------------------------------------|
| TC-511-03-xmx | I/O SmartSlot V2 Internal 40 Channel Input to VFTA (UL)                                      |
| TC-512-02-xmx | I/O SmartSlot V2 External 40 Channel Input to VFTA                                           |
| TC-512-03-xmx | I/O SmartSlot V2 External 40 Channel Input to VFTA (UL)                                      |
| TC-516-02-xmx | I/O SmartSlot V2 Internal 40 Channel Output to Flying Lead / Free Wire (Integral Power)      |
| TC-516-03-xmx | I/O SmartSlot V2 Internal 40 Channel Output to Flying Lead / Free Wire (Integral Power) (UL) |
| TC-517-02-xmx | I/O SmartSlot V2 External 40 Channel Output to FTA (Integral Power)                          |
| TC-517-03-xmx | I/O SmartSlot V2 External 40 Channel Output to FTA (Integral Power) (UL)                     |
| TC-518-02-xmx | I/O SmartSlot V2 External 40 Channel Output to Flying Lead / Free Wire (Integral Power)      |
| TC-518-03-xmx | I/O SmartSlot V2 External 40 Channel Output to Flying Lead / Free Wire (Integral Power) (UL) |
| TC-521-02-xmx | I/O SmartSlot V2 Internal T8472 16 Channel Output to T8871 FTA                               |
| TC-521-03-xmx | I/O SmartSlot V2 Internal T8472 16 Channel Output to T8871 FTA (UL)                          |

**Table 1 Trusted I/O SmartSlot Cables**

## 2. I/O SmartSlot Cable Type TC-501

This type of cable, and the modules/FTAs it is used with, is shown in Figure 1 below.

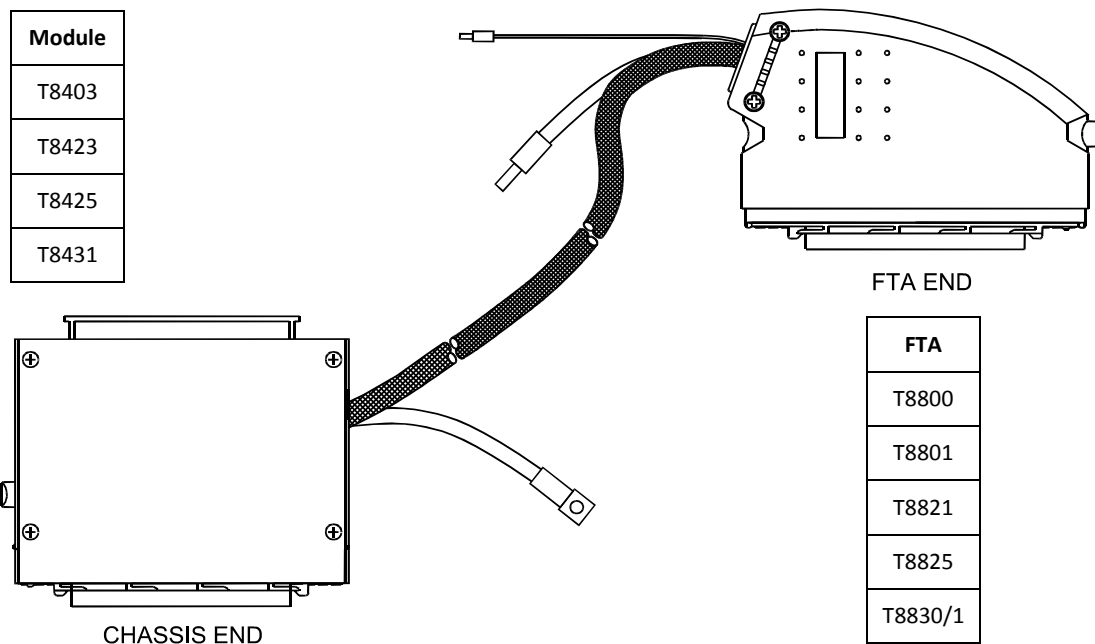

**Figure 1 I/O SmartSlot Cable Type TC-501**

This type of Trusted I/O SmartSlot Cable is designed for use with analogue or digital input modules and is suitable for connecting input signals from an internal FTA to the module.

The chassis end of the multi-core cable is fitted with a 96-way type 'C' connector housed in a single-width hood (type TC-500). The other end of the cable is fitted with a 96-way type 'R' connector housed in a single-width hood enabling the cable to be connected to an FTA.

The multi-core cable is stripped back 1.5 m at both ends, then shrouded in nylon Rilgain sheathing. The ends of the sheathing are heated or fitted with over sleeving to help prevent fraying.

At both the chassis and remote end, a sheathed braid allows the connector hood to be wired to safety earth. At the remote end, the multi-core screen drain is wired to a green wire to allow connection to screen earth.