

# 3300/50 Tachometer

Bently Nevada™ Asset Condition Monitoring

## Description


The 3300/50 Tachometer continuously measures shaft rotative speed, rotative acceleration, or provides an output for zero speed indication. The tachometer provides a proportional voltage or current output on the rear terminal strip and supplies Alert status via relay contacts for use with an external annunciator panel.

Although a single channel monitor, the 3300/50 Tachometer accepts inputs from two transducers. Voting logic between the two transducers is internal to the monitor, minimizing false indications in the event of a single transducer failure.

### Warning

Bently Nevada 3300/50 Tachometers are not designed for use independently as, or as a component of, a speed control or overspeed protection system. Bently Nevada 3300/50 Tachometers do not provide protective redundancy and the response speed needed for reliable operation as a speed control or overspeed protection system. Where provided, the analog proportional output is suitable for data logging or chart recording purposes only. Also, where provided, speed alert setpoints are suitable for annunciation purposes only.

Failure to take the above warnings into account constitutes a misuse of the product and may result in property damage and/or bodily injury. When applications require machine overspeed protection, use Bently Nevada's 3300/53 or 3500/53 Electronic Overspeed Detection Monitors instead.

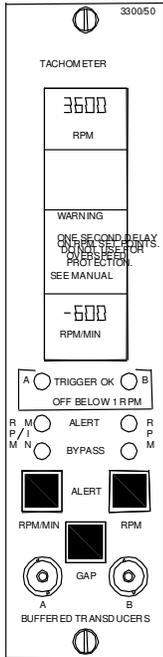

imagination at work

Specifications and Ordering Information  
Part Number 141512-01  
Rev. H (08/07)

Page 1 of 10

---

## Specifications

### Inputs

#### Transducers:

Bently Nevada 3300, 7200, or 3000 series proximity probes; Magnetic pickups.

**Note:** Magnetic pickups are not recommended for zero speed monitoring.

#### Signal:

Accepts two transducer signals. The monitor can operate with any combination of the above inputs.

#### Input Impedance:

10 k  $\Omega$ .

#### Power Consumption:

Nominal consumption is 2.5 watts.

---

### Signal Conditioning

#### Monitor Range:

Shaft rotative speed (rpm) monitor operates from 1 to 99,999 rpm. Rotor acceleration/deceleration (rpm/min) monitor operates from -9,999 to 9,999 rpm/min. Zero Speed operates below 100 rpm.

#### Accuracy:

Within  $\pm 1$  rpm for speed display and within 20 rpm/min for rotor acceleration display.

Specified at ambient temperature of +25°C (+77°F).

---

### Transducer Conditioning

#### Auto Threshold:

Use for any input above 10 Hz (600 rpm for 1 event/revolution) to 10 KHz.

#### Duty Cycle:

1% minimum

#### Manual Threshold:

User-selectable from 0 to -18 Vdc.

#### Hysteresis:

User-selectable from 0.2 to 2.0 Volts.

#### Events per Revolution Option:

User-selectable from 1 to 255 for numerator and 1 to 255 for denominator. Num/Den  $\geq 0.1$ .

---

### Outputs

#### Recorder:

User-programmable for +4 to +20 mA, 0 to -10 Vdc, or +1 to +5 Vdc. Voltage or current outputs are proportional to selected monitor full-scale. Individual recorder outputs are proportional to shaft rotative speed (rpm), and rotor acceleration (rpm/min).

#### Recorder accuracy (in addition to signal conditioning accuracy):

All specified at +25°C (+77°F).

**+4 to +20 mA:**  $\pm 1.8\%$  of signal,  $\pm 0.09$  mA offset.

**+1 to +5 Vdc:**  $\pm 2.2\%$  of signal,  $\pm 10$  mV offset.

**0 to -10 Vdc:**  $\pm 2.1\%$  of signal,  $\pm 15$  mV offset.

#### Output Impedance (voltage outputs):

100  $\Omega$ . Minimum load resistance is 10 k  $\Omega$ .

**Voltage Compliance (current outputs):**

0 to +12 Vdc range across load. Load resistance is 0 to 600 Ω when using +4 to +20 mA option.

**Buffered Transducer Outputs:**

One coaxial connector per transducer on the front panel. Both are short-circuit protected.

**Output Impedance:**

100 Ω.

**Transducer Supply Voltage:**

User-programmable in Power Supply for -24 Vdc or -18 Vdc. Current limited on individual monitor circuit board.

---

**Alarms**

**Alarm Setpoints:**

All Alarm setpoints are digitally adjustable. They are adjusted using tamper proof switches on the monitor circuit board and up/down switches on the System Monitor front panel. Both rpm and delta rpm/min alarms are user-selectable from 0 to 100% of full-scale display. Zero Speed Alert can be selected (and changed) at any speed below 100 rpm. Alarm setpoints are stored in nonvolatile memory.

**Alarms and OK Relay Drives:**

Two Alarm relay drive signals and one OK relay drive signal.

**Monitor Alarm Functions:**

Both Alarm signals are independently field adjustable and selectable for overspeed or

underspeed annunciation, and are user-programmable for latching or nonlatching operation.

**Alarm Time Delays:**

Tachometer or Rotor Acceleration Tachometer: one second or three valid input triggers, whichever is greatest. Zero Speed (<100rpm): three valid input triggers. One minute maximum is required to declare an Alarm when three input triggers are not detected (machine rotor at zero rpm). One valid pulse after power up is required to enable alarm detection.

---

**Relay Modules**

**Location:**

One relay module can be installed behind each monitor. At least one alarm relay module must be ordered with each 3300 System.

---

**Display**

**LCD Indicators:**

The front panel LCD can display both rpm and Rotor Acceleration in two separate five digit numbers. Digits also indicate probe gap voltage. The Zero Speed display section indicates whether that function is enabled.

**RPM and RPM/MIN Character Size:**

84 mm x 38 mm  
(0.33 in x 0.15 in).

**RPM Range:**

1 to 99,999 rpm.

**Resolution:**

±1 rpm.

**Accuracy:**

±1 rpm.

**RPM/MIN Range:**  
-9,999 to 9,999 rpm/min.

**Resolution:**  
±1 rpm/min.

**LED Indicators OK:**  
One constant ON green OK LED for transducer A and one constant ON green OK LED for transducer B indicate OK operational condition of monitor. Constant OFF indicates the operational speed is below 1 rpm or above 99,999 rpm. When in NOT OK condition or the monitor is by-passed, the red bypass LED will be ON. OK LED flashing at 5 Hz indicates error code(s) stored in memory.

**Alert:**  
Two red LEDs per channel indicate alert status. Flashing Alert LED indicates First Out, independent for Alert 1 and Alert 2  
**Note:** The Tachometer only drives the Rack First Out Alert Bus.

**Bypass:**  
One red LED indicates status of Alert 2 Bypass and Rack / Monitor Bypass functions.

---

### Environmental Limits

**Operating Temperature:**  
0°C to +65°C (+32°F to +150°F).

**Storage Temperature:**  
-40°C to +85°C (-40°F to +185°F).

**Relative Humidity:**  
To 95%, noncondensing.

---

### CE Mark Directives

**EMC Directive**

Certificate of Conformity: 158710

### Low Voltage Directive

Certificate of Conformity: 135300

---

### Hazardous Area Approvals

#### CSA/NRTL/C

Class I, Div 2  
Groups A, B, C, D  
T4 @ Ta = +65 °C

#### Certification Number

150368 – 1002151 (LR 26744)

#### ATEX

 II 3 G  
EEx nC[L] IIC  
T4 @ Ta = -20°C to +60°C  
When installed per document number 132577-01.

#### Certification Number

BN26744C-55A

---

### Physical

#### Space Requirements:

One rack position (any position except 1 and 2, which are reserved for the Power Supply and System Monitor, respectively).

#### Weight:

1 kg (2.2 lbs.).

---

### Ordering Information

For spares, order the complete catalog number as described below. This includes a front panel assembly, monitor PWAs with sheet metal, and appropriate relay module. This unit is optioned, tested and ready to install in your system. Spare relay modules can be ordered separately.

Specifications and Ordering Information  
Part Number 141512-01  
Rev. H (08/07)

<b>Tachometer</b>	<b>88843-07(17)</b>	
<b>3300/50-AXX-BXX-CXX-DXX</b>		No Relays, Internal Barriers
<b>A: Tachometer Type Option</b>	<b>88843-04(14)</b>	
<b>01</b> Dual Setpoint Tachometer		
<b>02</b> Zero Speed Tachometer		Dual Epoxy Relays, Internal Barriers
<b>03</b> Rotor Acceleration Tachometer		
<b>B: Alert Relay Option</b>	<b>88843-01(11)</b>	
<b>00</b> No Relays		Dual Hermetic Relays, Int Barriers
<b>01</b> Epoxy-sealed		
<b>02</b> Hermetically-sealed		
<b>04</b> Spare Monitor-No SIM/SIRM	<b>ZERO SPEED</b>	
Notes:	<b>84690-01(02)</b>	
At least one relay module must be ordered with each 3300 System. If one common relay module per system has been ordered, all monitors of this type must be jumper programmed at the factory to activate a relay bus by ordering a Special Configuration Kit (SCK). Contact your nearest Bently Nevada office for information.		No Relays
Agency approval places limitations on the relay module. Refer to the Relay Module data sheet for information.	<b>84141-01(02)</b>	
		Dual Epoxy Relays
	<b>84147-01(02)</b>	
		Dual Hermetic Relays
	<b>88843-08(18)</b>	
		No Relays, Internal Barriers
	<b>88843-05(15)</b>	
		Dual Epoxy Relays, Internal Barriers
<b>C: Agency Approval Option</b>	<b>88843-02(12)</b>	
<b>00</b> Not Required		
<b>01</b> CSA/NRTL/C		Dual Hermetic Relays, Int Barriers
<b>02</b> ATEX self certification		
<b>Note:</b> ATEX approval requires the monitor rack be installed in a weatherproof housing.	<b>ROTOR ACCEL</b>	
<b>D: Safety Barrier Option</b>	<b>84691-01(02)</b>	
<b>00</b> None		No Relays
<b>01</b> External		
<b>02</b> Internal	<b>84142-01(02)</b>	
<i>Spare Relay Module Assemblies</i> (Order the option in parenthesis for ATEX approved spares)		Dual Epoxy Relays
	<b>84148-01(02)</b>	
<b>DUAL SETPOINT</b>		Dual Hermetic Relays
<b>84689-01(02)</b>	<b>88843-09(19)</b>	
No Relays		No Relays, Internal Barriers
<b>84140-01(02)</b>	<b>88843-06(16)</b>	
Dual Epoxy Relays		Dual Epoxy Relays, Internal Barriers
<b>84146-01(02)</b>	<b>88843-03(13)</b>	
Dual Hermetic Relays		Dual Hermetic Relays, Int Barriers