



## FS-TRO-0824 Digital output (relay contact) FTA (8 channels, NO/NC)

### Description

The field termination assembly module FS-TRO-0824 is the interface between the system interconnection cable SIC-C-12 and the external field wiring (screw terminals). It has eight non-fail-safe potential-free relay changeover contacts (NO/NC). The energized state of the relay is indicated by an LED on the module.

Eight channels can be connected to the FS-TRO-0824 module via the system interconnection cable SIC-C-12. This cable is plugged into the SIC connector on the FTA module, and connects to a (redundant pair of) 10201/2/1 module(s).

The FTA module has a universal snap-in facility for standard DIN EN rails, and screw terminals for connecting field wiring.

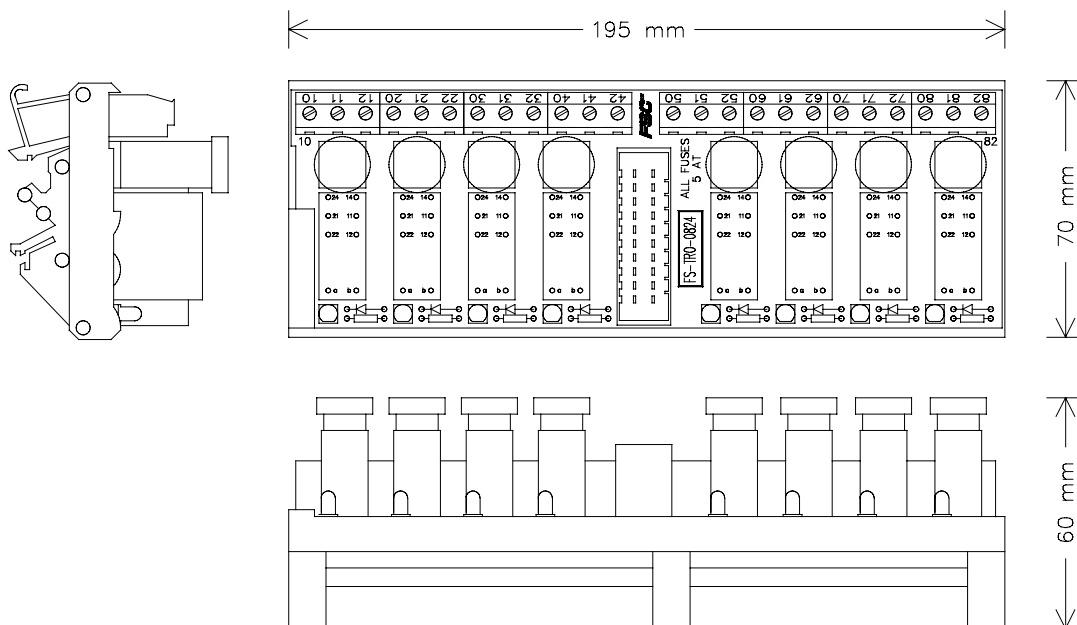


Figure 1 Mechanical layout

Each channel consists of:

- one relay,
- a changeover contact with a fused (5 AT) common, and
- a status indicator LED.

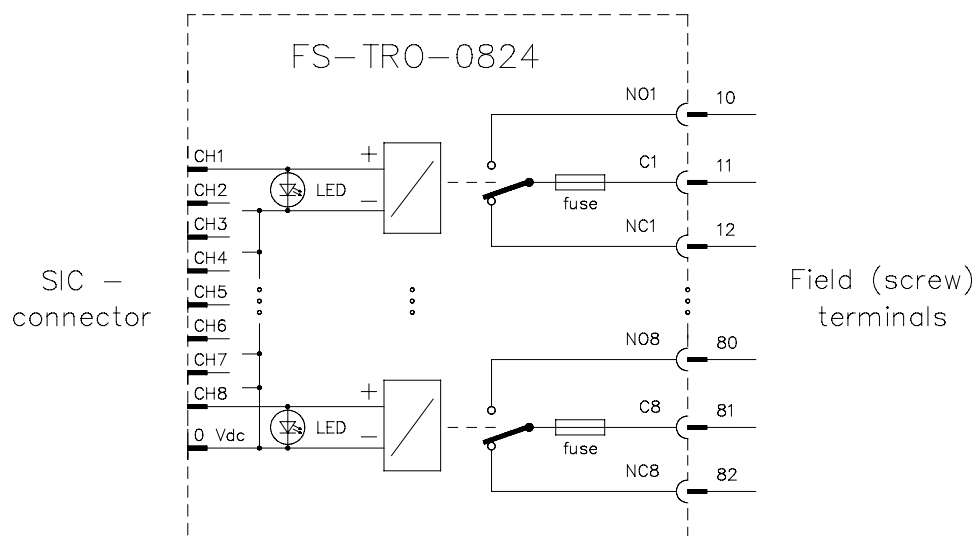


Figure 2 Schematic diagram

## Applications

For details on applications and connection options for the FS-TRO-0824 module refer to the 'SIC to FTA applications' data sheet.



## Connections

The connections diagram of the FS-TRO-0824 module is as follows:

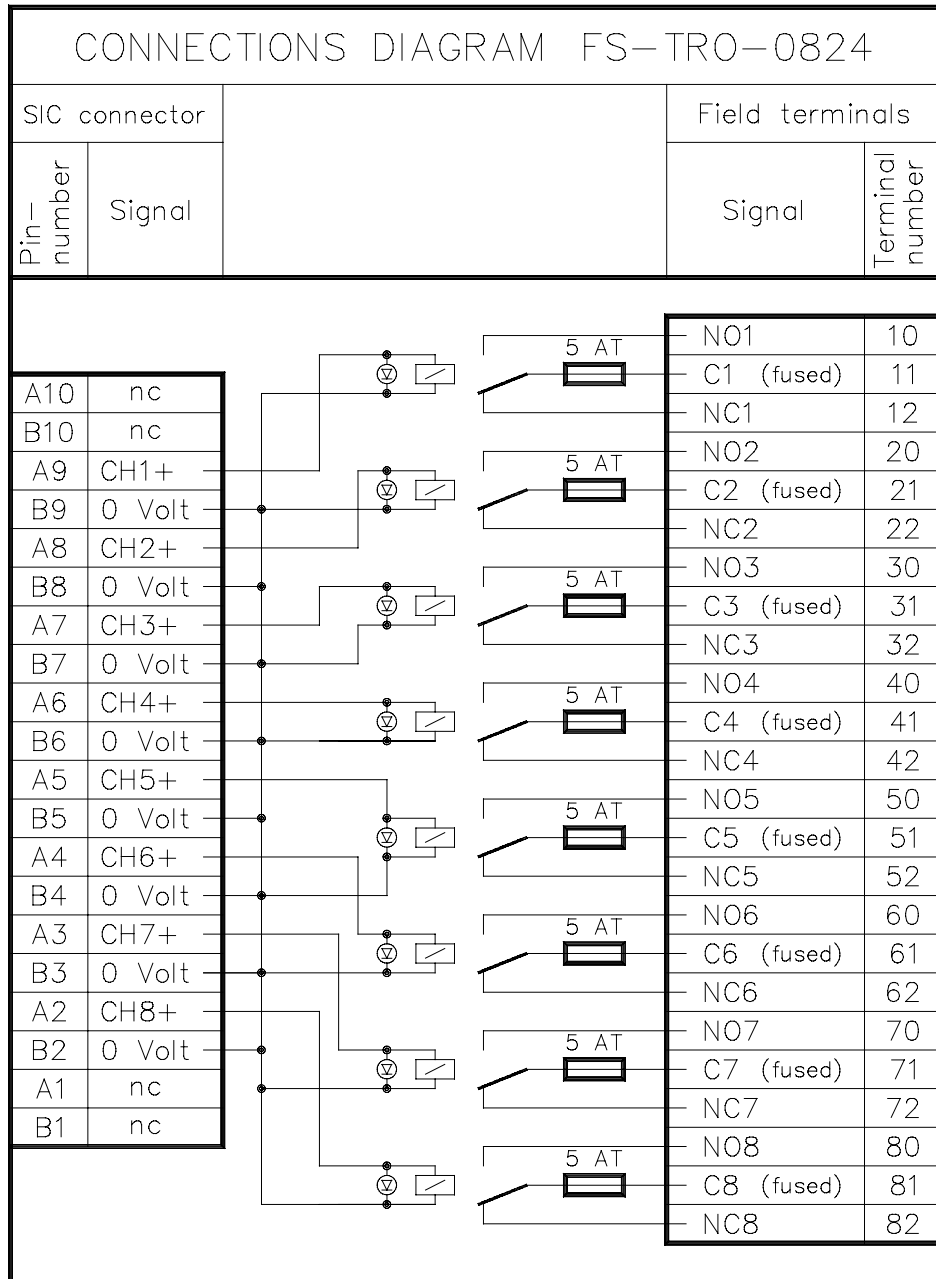


Figure 3 Connections diagram



## Technical data

The FS-TRO-0824 module has the following specifications:

<b>General</b>	Type number:	FS-TRO-0824
	Approvals:	CE, UL, TÜV approvals pending
<b>Input</b>	Nominal input voltage:	24 Vdc
	Max. input voltage:	31 Vdc
	Relay cut-in voltage:	19 Vdc
	Input current:	typically 27 mA at 24 Vdc
<b>Output</b>	Number of output channels:	8
	Max. output current:	5 A
	Max. output voltage:	250 Vac / 300 Vdc
	Max. switched load:	1250 VA / 150 W at 30 Vdc (see Figure 4)
<b>Fuses</b>	Rating:	5 AT (slow-acting)
	Dimensions	5 x 20 mm (0.20 x 0.79 in)
<b>Physical</b>	Module dimensions:	195 x 70 x 60 mm (L x W x H) 7.68 x 2.76 x 2.36 in (L x W x H)
	DIN EN rails:	TS32 / TS35 x 7.5
	Used rail length:	196 mm (7.72 in)
<b>Termination</b>	Screw terminals:	
	– max. wire diameter	2.5 mm <sup>2</sup> (AWG 14)
	– strip length	7 mm (0.28 in)
	– tightening torque	0.5 Nm (0.37 ft-lb)
<b>Relay contacts</b>	Max. current:	8 A
	Max. switched voltage:	250 Vac / 300 Vdc
	Max. switched load:	2000 VA / 192 W at 24 Vdc (see Figure 4)
	Max. switching frequency:	20 Hz
	Expected life:	
	– electrical	100,000 switch operations
	– mechanical	30,000,000 switch operations



## Technical data (continued)

### Relay contacts (cont.)

Isolation:

– coil to contact 4000 Vac

– contact to contact 1000 Vac

Ambient temperature:  $-40^{\circ}\text{C}$  to  $+70^{\circ}\text{C}$  ( $-40^{\circ}\text{F}$  to  $+158^{\circ}\text{F}$ )

Contact material: silver-cadmium oxide

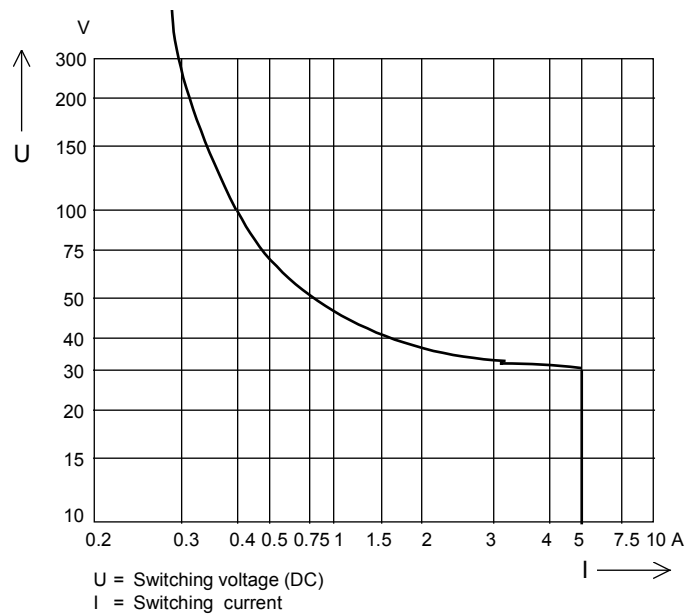


Figure 4 Maximum DC switched power curve for FS-TRO-0824 module

*While this information is presented in good faith and believed to be accurate, Honeywell Safety Management Systems B.V. disclaims the implied warranties of merchantability and fitness for a particular purpose and makes no express warranties except as may be stated in its written agreement with and for its customer. In no event is Honeywell Safety Management Systems B.V. liable to anyone for any indirect, special or consequential damages. The information and specifications in this document are subject to change without notice.*