


vibro-meter
certified by

CA 201

Piezoelectric Accelerometer Type CA 201

CHARACTERISTICS

- Industrial vibration monitoring
- High sensitivity
- Differential output
- Hermetically welded
- CENELEC approved
- Internal case insulation
- Integral cable


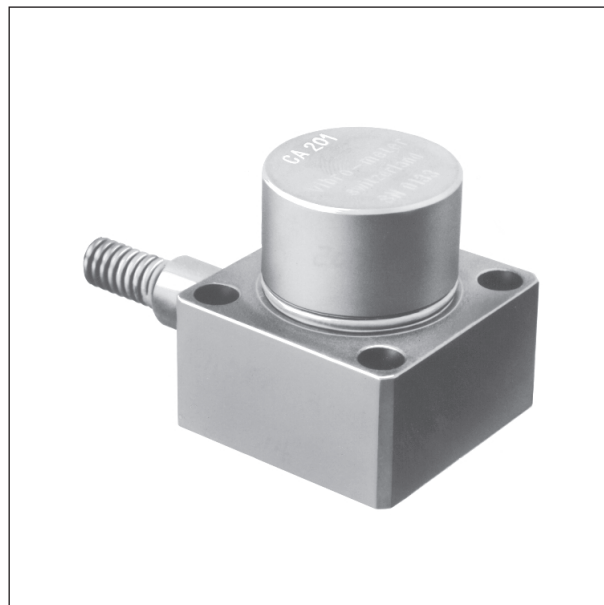


DESCRIPTION

The CA 201 accelerometer is equipped with a symmetrical shear mode polycrystalline measuring element, which has internal case insulation. The transducer is designed for heavy-duty industrial monitoring

and measurement of vibration. The accelerometer is fitted with an integral cable protected by a stainless steel flexible tube welded to the case. The CA 201 accelerometer is available in CENELEC approved versions and has a high sensitivity.

Mechanical Drawing :

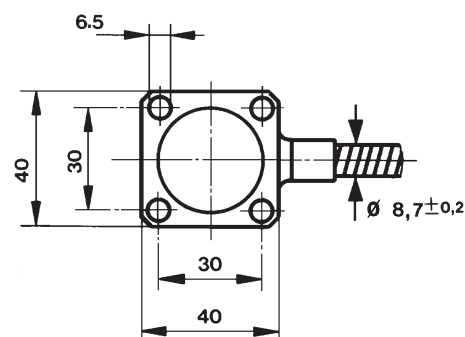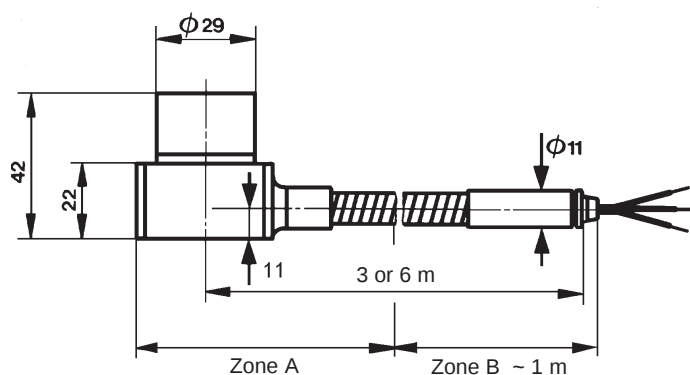

Min. bending radius: 50 mm.
Clipping points of the cable should
be no more than 100 to 200 mm apart.

GENERAL

Input power requirements :

None

Signal transmission :

2 pole system insulated from casing, charge output

Signal processing :

Charge amplifier

OPERATING TEMPERATURE (at 23°C ±5°C)**Sensitivity** (at 120 Hz) :

100 pC/g ±5%

Dynamic measuring range (random) :

0.0001 g to 200 g peak

Overload capacity (spikes) :

Up to 250 g peak

Linearity :

≤1% between 0.0001 g and 20 g peak, max. 2% between 20g and 200 g peak

Transverse sensitivity :

≤5%

Resonant frequency (mounted) :

11 kHz nominal

Frequency response :

±5% between 0.5 Hz and 3000 Hz (lower cut off frequency is determined by conditioner used) ≤10% between 3 kHz and 4.5 kHz

Internal insulation resistance :Min. 10⁸ ohms**Capacitance :**

3300 pF nominal pole to pole, 1200 pF nominal pole to casing (for 6 m integral cable)

Calibration :Dynamic calibration at factory at 5 g peak and 120 Hz (+23°C).
No subsequent calibration necessary.**Accessories :**JB 105 / JB 116 Junction box
IPC Signal conditioner

ENVIRONMENTAL

Temperature range- Zone A : -54°C to +260°C
- Zone B : -54°C to + 125°C
 (+100°C Ex i version)
 (+260°C for cable)**Temperature error :**

Typically 0.1% per °C between 23°C and 125°C, typically +25% at 250°C

Shock acceleration :

≤500 g peak (half sine 1 ms)

Explosive atmosphere :Available in CENELEC approved version, PTB conformance
certificat No Ex-80/2183 EEx ib IIC T5**Corrosion, humidity :**

Stainless austenitic steel, hermetically welded

Base strain sensitivity :≤10⁻⁵g/με

MECHANICAL

Cable :

2 pole twisted and shielded

Cable weight :

122 g/m

Mounting :4 Allen screws M6x35 with M6 spring lock washers, screw
torque 15 Nm. No need for electrical insulation of mounting
surface**WEIGHT :**

600 g with 3 m BOA-steeltube protected cable

Ordering Information :

To order please specify:

- Type and designation	: CA 201 Piezoelectric accelerometer	
- Ordering No.	: With integral cable 3 m	144-201-000-2
	With integral cable 6 m	144-201-000-4
	Ex i with integral cable 3 m	144-201-000-1



Due to the continual development of our products we reserve the right to modify the specifications without forewarning.

**Head Office**

Vibro-Meter SA, Rte de Moncor 4,
P.O. Box 1071, CH-1701 Fribourg, Switzerland
Phone : +41 26-407 11 11
Fax Industrial & Marine : +41 26-407 13 01
Fax Aerospace : +41 26-402 36 62
Fax Instrumentation : +41 26-407 13 75
E-mail : vmsa@vibro-meter.ch
Internet : www.vibro-meter.com
www.meggitt.com

Sales Offices in :

♦ Germany	♦ France
♦ USA	♦ Canada
♦ Singapore	♦ United Kingdom
♦ Russia	♦ Ukraine

Agents in over 30 countries

Vibro-Meter is a member of the
Meggitt Aerospace Systems Division