


3300 XL High-Pressure Feedthrough

Datasheet

Cordant™

141622 Rev. G

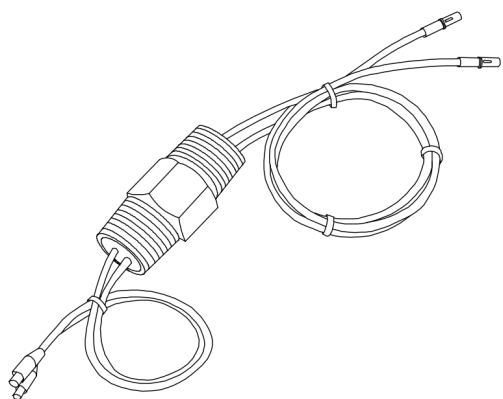

Description

This product allows placement of 3300 XL 8 mm probes, 3300 XL 11 mm, and 3300 5 mm probes in pressurized machines.

Some rotating machines have significant differential pressure between the inside of the machine case and ambient conditions where the extension cable exits. Since proximity probes are mounted inside the pressurized area, a safe, convenient way to route the probe cable through the case is essential. Depending upon the pressure, a cable seal or High-Pressure (HP) Feedthrough is used to seal pressure inside the machine case and allow probe connections outside the case.

Three models of the 3300 XL 8 mm Series High-Pressure Feedthrough are available which can route 1, 2, or 3 cables through the case. One model of the 3300 XL 11 mm Series High-Pressure Feedthrough is available which can route 2 cables through the case. These models seal 2.76 MPa (400 psi) inside the machine. They are ordered according to the total length of the Proximitor sensor so that system electrical length is maintained.

When ordering, careful consideration should be given to the type of O-ring specified. The O-ring must be compatible with the type of gas or fluid that the cable will be exposed to in the machine.

In addition, since these feedthroughs are used in place of probe extension cables, the high pressure end is usually supplied with female connectors and the low pressure end with male connectors. This permits compatibility with standard probes and Proximitor Sensors. The connectors are corrosion-resistant, gold-plated brass ClickLoc connectors. These connectors require only finger-tight torque when

mated to 3300 XL Proximity Sensors or ClickLoc connectors on 3300 XL 8 mm probes, 3300 XL 11mm, or 3300 5 mm probes.

We can also offer modified feedthroughs, which can seal up to 6.89 MPa (999 psi). Contact your sales representative for more information on these products. Bently.com

Fitting Material	303 stainless steel.
------------------	----------------------



Beware that the feedthrough length ordered must be compatible with the total transducer system length being used.

Specifications

Operating Temperature



Temperature range depends on O-Ring Option

7 9	-51°C to 121°C (-60°F to 250°F)
8 4	-43°C to 121°C (-45°F to 250°F)
9 4	-26°C to 121°C (-15°F to 250°F)
Maximum Pressure Rating	2.76 MPa (400 psi).
Humidity	100% non-condensing



The cable to feedthrough interface should be protected from exposure to water. The Bently Nevada High Pressure Feedthrough is not designed or intended to seal water away from its internal cable leads. If the cable to Feedthrough interface is exposed to water (LP & HP sides), the water can migrate into the cable lead area of the feedthrough and create a high resistance electrical short that will significantly reduce the output of the transducer system.

Minimum Recommended Bend Radius	25.4 mm (1.00in) with or without armor.
---------------------------------	---

Compliance and Certifications

RoHS

European Community Directive:

RoHS Directive 2011/65/EU

China RoHS

Cables associated with the product(s) mentioned in this datasheet have an EFUP designation of 15 years, in accordance with SJ/T 11364-2024.



Ordering Information



For the detailed listing of country and product-specific approvals, refer to the [Approvals Quick Reference Guide \(108M1756\)](#).

For additional technical documentation, please log in to bntechsupport.com and access the Bently Nevada Media Library.

330161 Single Triaxial HP Feedthrough for 3300 System

330161-AA-BB-CC-DD-EE-FF

A: Armor Option

0 1	Without armor
0 2	With armor at low pressure end
0 3	With armor at high pressure end
0 4	With armor at both ends

B: Dimension 1 Length Option

4 0	4.0 metres
4 5	4.5 metres
8 0	8.0 metres
8 5	8.5 metres

C: Dimension 2 Length Option

Order in increments of 0.1 metre.

Minimum ordering length	0.5 metre.
Maximum ordering length	Dimension 1 (B option) minus 0.5 metre.

D: O-Ring Material Option

7 9	Ethylene propylene, for exposure to ammonium hydroxide, carbon dioxide, chlorine, nitrogen, gaseous oxygen and steam
8 4	Neoprene, for exposure to R-12 or R-134A refrigerants
9 4	Fluorocarbon, for exposure to butane, fuel oil, natural gas, petroleum oil, and turbine oil.

E: High Pressure End Connector Option

0 0	Without connector
0 1	With female miniature coaxial connector
0 2	With male miniature coaxial connector



For proper connection, the connector on the probe side must be female and the connector on the Proximitor Sensor side must be male.

F: Low Pressure End Connector Option

0 0	Without connector
0 1	With female miniature coaxial connector
0 2	With male miniature coaxial connector



For proper connection, the connector on the probe side must be female and the connector on the Proximitor Sensor side must be male.

330162 Dual Triaxial HP Feedthrough for 3300 System

330162-AA-BB-CC-DD-EE-FF-GG-HH

A: Armor Option

0 1	Without armor
0 2	With armor at low pressure end
0 3	With armor at high pressure end
0 4	With armor at both ends

B: Dimension 1 Length Option

4 0	4.0 metres
4 5	4.5 metres
8 0	8.0 metres
8 5	8.5 metres

C: Dimension 2 Length Option

4 0	4.0 metres
4 5	4.5 metres
8 0	8.0 metres
8 5	8.5 metres

D: Dimension 3 Length Option

Order in increments of 0.1 metre.

Minimum ordering length	0.5 metre.
Maximum ordering length	Dimension 1 (B option) minus 0.5 metre.

E: Dimension 4 Length Option

Order in increments of 0.1 metre.

Minimum ordering length	0.5 metre.
-------------------------	------------

Maximum ordering length	Dimension 2 (C option) minus 0.5 metre.
-------------------------	---

F: O-Ring Material Option

7 9	Ethylene propylene, for exposure to ammonium hydroxide, carbon dioxide, chlorine, nitrogen, gaseous oxygen and steam
8 4	Neoprene, for exposure to R-12 or R-134A refrigerants
9 4	Fluorocarbon, for exposure to butane, fuel oil, natural gas, petroleum oil, and turbine oil.

G: High Pressure End Connector Option

0 0	Without connector
0 1	With female miniature coaxial connector
0 2	With male miniature coaxial connector



For proper connection, the connector on the probe side must be female and the connector on the Proximitor Sensor side must be male.

H: Low Pressure End Connector Option

0 0	Without connector
0 1	With female miniature coaxial connector
0 2	With male miniature coaxial connector



For proper connection, the connector on the probe side must be female and the connector on the Proximitor Sensor side must be male.

330163 Triple Triaxial HP Feedthrough for 3300 System

330163-AA-BB-CC-DD-EE-FF-GG-HH-II-JJ

A: Armor Option

0 1	Without armor
0 2	With armor at low pressure end
0 3	With armor at high pressure end
0 4	With armor at both ends

B: Dimension 1 Length Option

4 0	4.0 metres
4 5	4.5 metres
8 0	8.0 metres
8 5	8.5 metres

C: Dimension 2 Length Option

4 0	4.0 metres
4 5	4.5 metres
8 0	8.0 metres
8 5	8.5 metres

D: Dimension 3 Length Option

4 0	4.0 metres
4 5	4.5 metres
8 0	8.0 metres
8 5	8.5 metres

E: Dimension 4 Length Option

Order in increments of 0.1 metre.

Minimum ordering length	0.5 metre
-------------------------	-----------

Maximum ordering length	Dimension 1 (B option) minus 0.5 metre.
-------------------------	---

F: Dimension 5 Length Option

Order in increments of 0.1 metre.

Minimum ordering length	0.5 metre.
Maximum ordering length	Dimension 2 (C option) minus 0.5 metre.

G: Dimension 6 Length Option

Order in increments of 0.1 metre.

Minimum ordering length	0.5 metre.
Maximum ordering length	Dimension 3 (D option) minus 0.5 metre.

H: O-Ring Material Option

7 9	Ethylene propylene, for exposure to ammonium hydroxide, carbon dioxide, chlorine, nitrogen, gaseous oxygen and steam
8 4	Neoprene, for exposure to R-12 or R-134A refrigerants
9 4	Fluorocarbon, for exposure to butane, fuel oil, natural gas, petroleum oil, and turbine oil.

I: High Pressure End Connector Option

0 0	Without connector
0 1	With female miniature coaxial connector
0 2	With male miniature coaxial connector



For proper connection, the connector on the probe side must be female and the connector on the Proximito Sensor side must be male.

J: Low Pressure End Connector Option

0 0	Without connector
0 1	With female miniature coaxial connector
0 2	With male miniature coaxial connector



For proper connection, the connector on the probe side must be female and the connector on the Proximito Sensor side must be male.

330762 Dual Triaxial HP Feedthrough for 3300 XL 11mm System

330762-AA-BB-CC-DD-EE-FF-GG-HH

A: Armor Option

0 1	Without armor
0 2	With armor at low pressure end
0 3	With armor at high pressure end
0 4	With armor at both ends

B: Dimension 1 Length Option

4 0	4.0 metres
8 0	8.0 metres

C: Dimension 2 Length Option

4 0	4.0 metres
8 0	8.0 metres

D: Dimension 3 Length Option

Order in increments of 0.1 metre.

Minimum ordering length	0.5 metre.
Maximum ordering length	Dimension 1 (B option) minus 0.5 metre.

E: Dimension 4 Length Option

Order in increments of 0.1 metre.

Minimum ordering length	0.5 metre.
Maximum ordering length	Dimension 2 (C option) minus 0.5 metre.

F: O-Ring Material Option

7 9	Ethylene propylene, for exposure to ammonium hydroxide, carbon dioxide, chlorine, nitrogen, gaseous oxygen and steam
8 4	Neoprene, for exposure to R-12 or R-134A refrigerants
9 4	Fluorocarbon, for exposure to butane, fuel oil, natural gas, petroleum oil, and turbine oil.

G: High Pressure End Connector Option

0 0	Without connector
0 1	With female miniature coaxial connector
0 2	With male miniature coaxial connector



For proper connection, the connector on the probe side must be female and the connector on the Proximitor Sensor side must be male.

H: Low Pressure End Connector Option

0 0	Without connector
0 1	With female miniature coaxial connector
0 2	With male miniature coaxial connector



For proper connection, the connector on the probe side must be female and the connector on the Proximitor Sensor side must be male.

Graphs and Figures

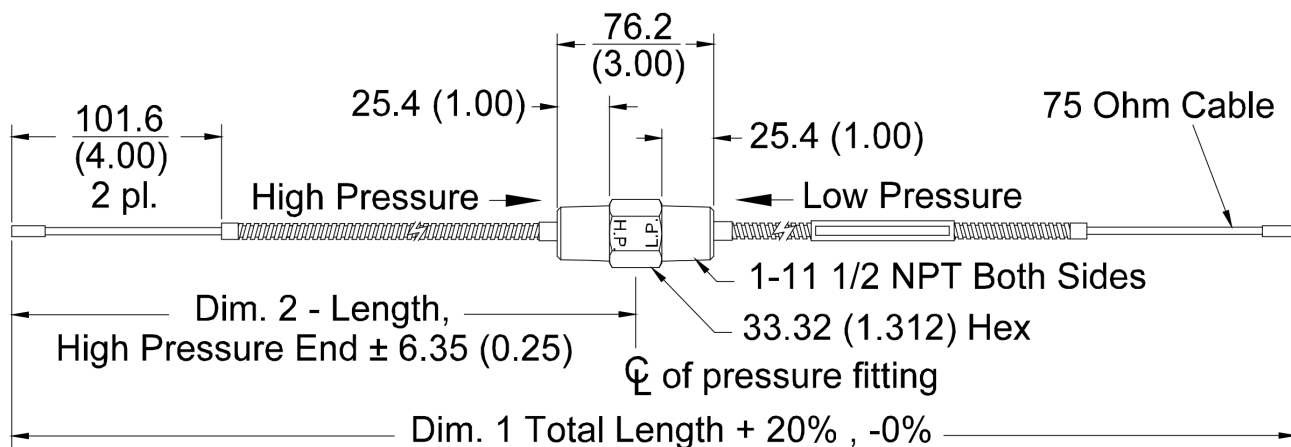


Figure 1: Part Number 330161 Single Feedthrough

Dimensions are in millimetres (inches)

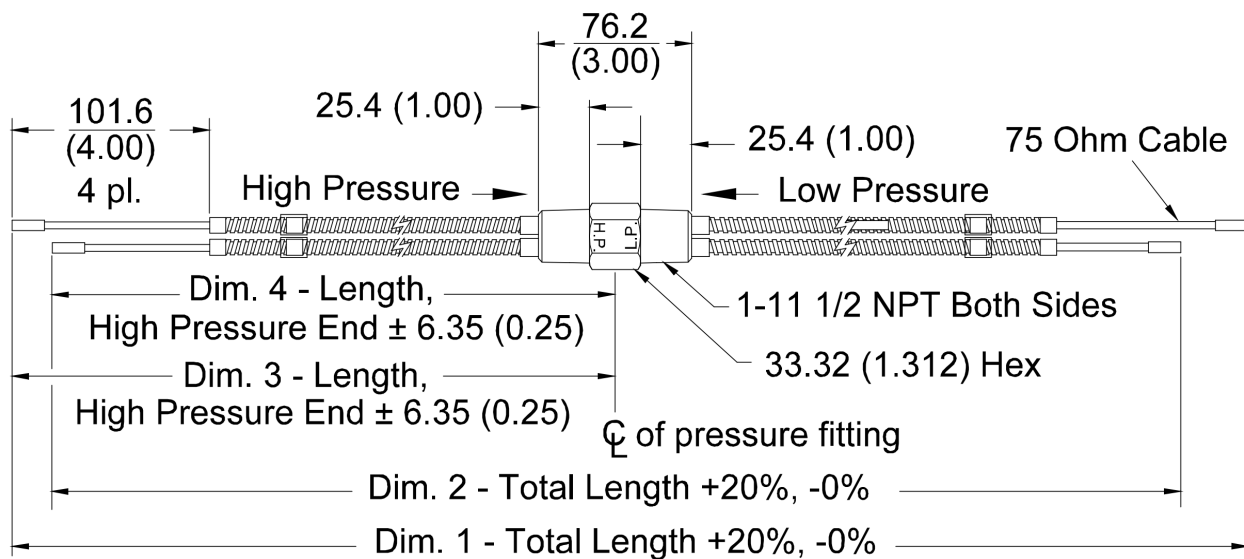


Figure 2: Part Number 330162 Dual Feedthrough

Dimensions are in millimetres (inches)

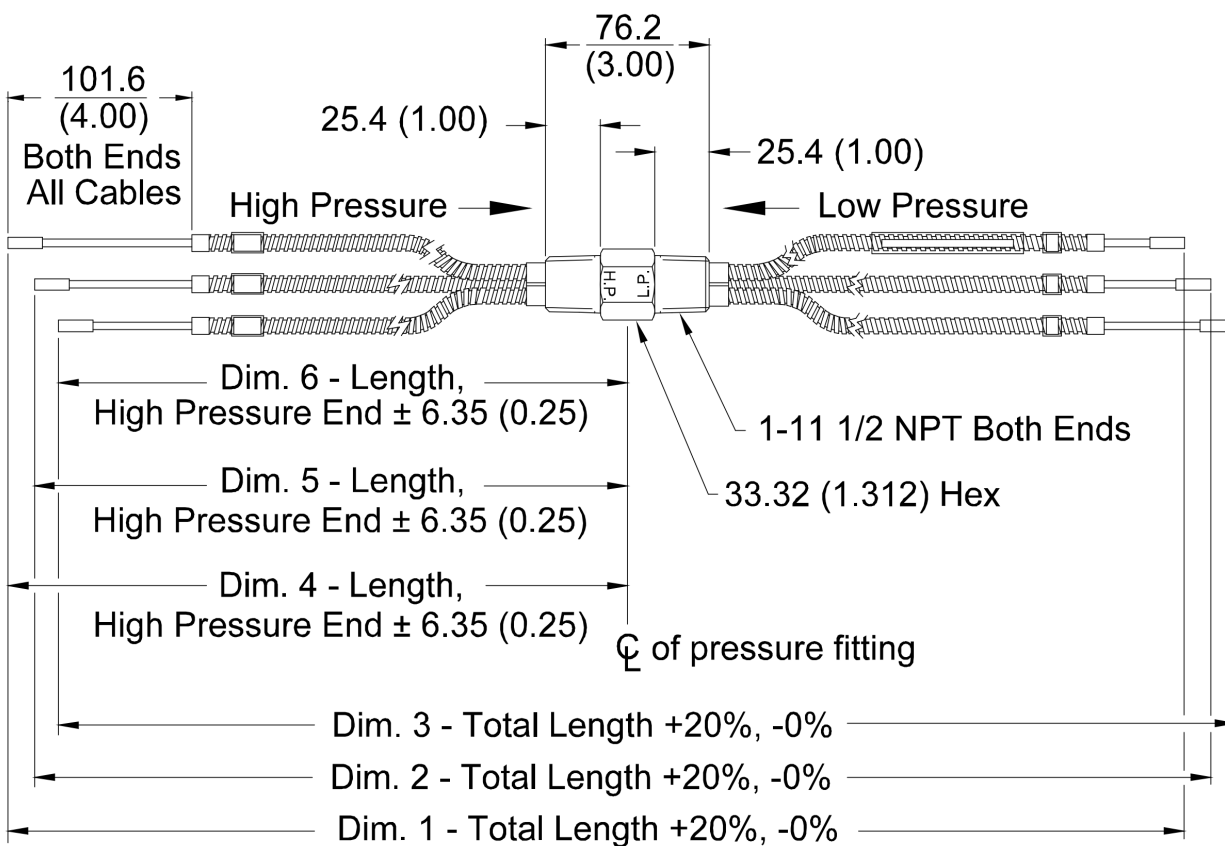


Figure 3: Part Number 330163 Triple Feedthrough

Dimensions are in millimetres (inches)

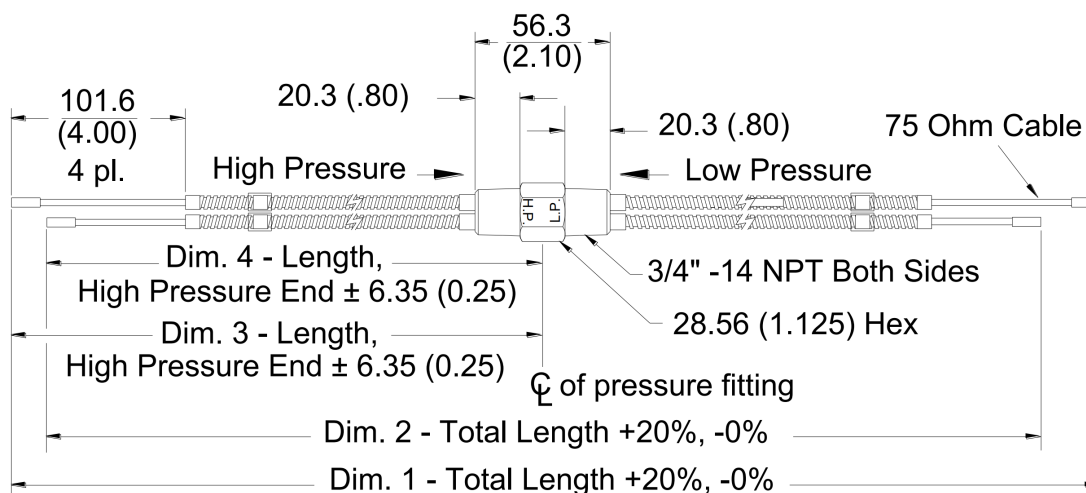


Figure 4: Part Number 330762 Dual Feedthrough, 3300 XL 11mm System

Dimensions are in millimetres (inches)

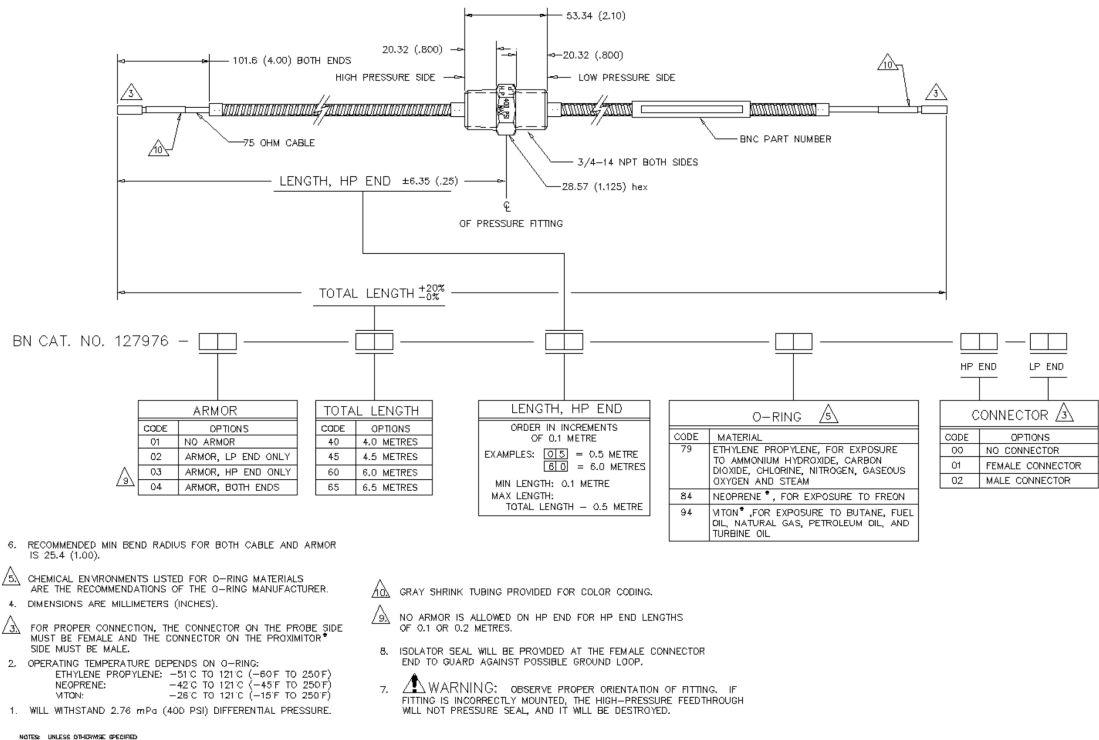


Figure 5: Part Number 127976, High Pressure Feedthrough Single Cable NSv System

Dimensions are in millimetres (inches)

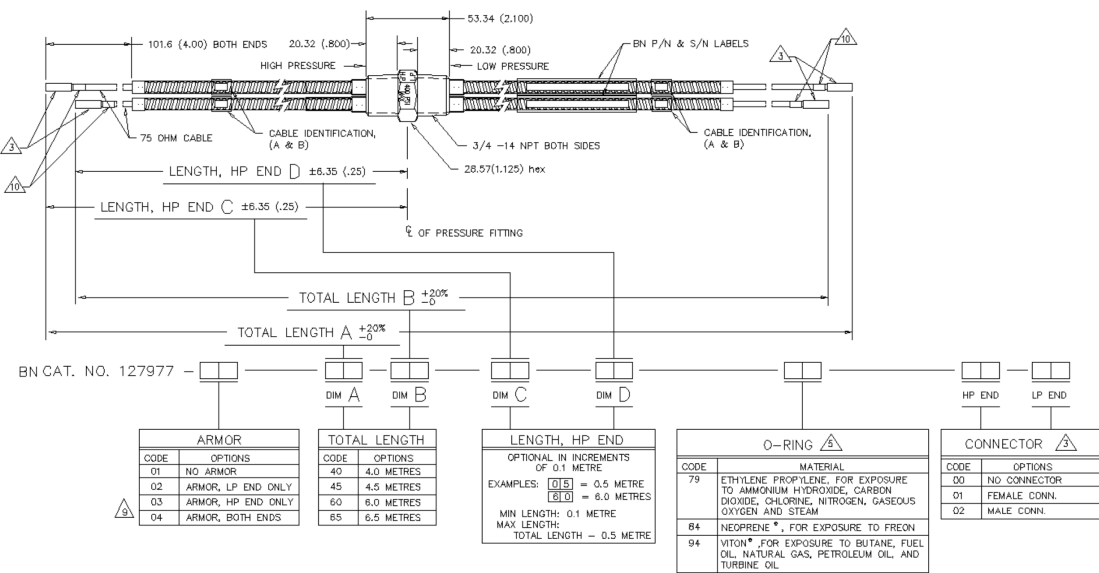


Figure 6: Part Number 127977, High Pressure Feedthrough Dual Cable NSv System

Dimensions are in millimetres (inches)

Copyright 2025 Baker Hughes Company. All rights reserved.

Bently Nevada, a Baker Hughes Company
1631 Bently Parkway South, Minden, Nevada USA 89423
<https://bntechsupport.com>