
Catalogue No: **1756-PB75R**

CONTROLLOGIX 19-32V DC 13A REDUNDANT POWER SUPPLY

Automation Systems > Modular Programmable Controllers > Large PLC Systems > Allen-Bradley ControlLogix® > ControlLogix® Power Supplies

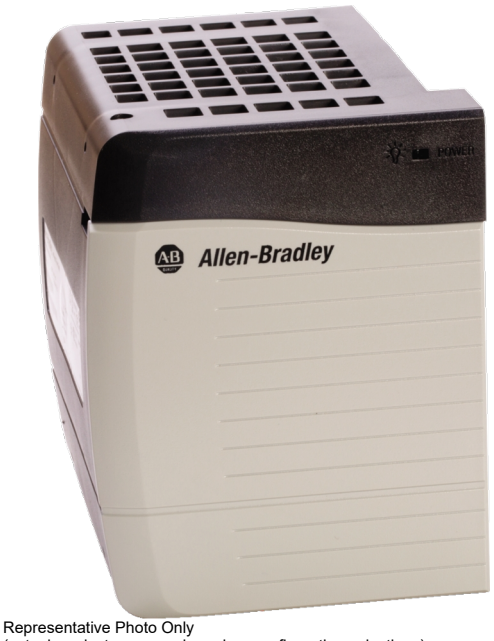

Representative Photo Only
(actual product may vary based on configuration selections)

ControlLogix Power Supply Redundant 19-32V DC

- All regulated voltages necessary for any ControlLogix® module to operate in the chassis
- Limited hold-up time for fluctuations in incoming line power
- Enables orderly system shutdown by signaling modules in the chassis of imminent voltage failure
- conformal coated options are available - contact NHP for further information

SPECIFICATIONS	
Product Series	ControlLogix (Bul. 1756 / 1757)
Component Type PLC & I/O	Power Supply
Operating Temperature, Max	60 °C max
Operating Temperature, Min	0 °C min
Storage Temperature, Max	85 °C max
Storage Temperature, Min	-40 °C min
Relative Humidity, Max	95 %RH
Vibration Acceleration (Max.)	2 m/s²
Vibration Frequency, Operational (Max.)	500 Hz
Standards Compliance	IEC 60068-2-1 IEC 60068-2-14 IEC 60068-2-2 IEC 60068-2-27 IEC 60068-2-30 IEC 60068-2-6 IEC 61000-4-2 IEC 61000-4-29 IEC 61000-4-3 IEC 61000-4-4 IEC 61000-4-5 IEC 61000-4-6 IEC 61000-6-4
Certifications	ATEX CE CSA FM KC (KCC) RCM C-UL-US

REFERENCES	
IECEx Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-