
Catalogue No: 1794-OB8EP

FLEX I/O 8DO 24V DC ELECTRONICALLY PROTECTED MODULE

Automation Systems > Distributed I/O and Signal Converters > Fieldbus I/O Systems > Allen-Bradley FLEX™ I/O > FLEX™ I/O Modules

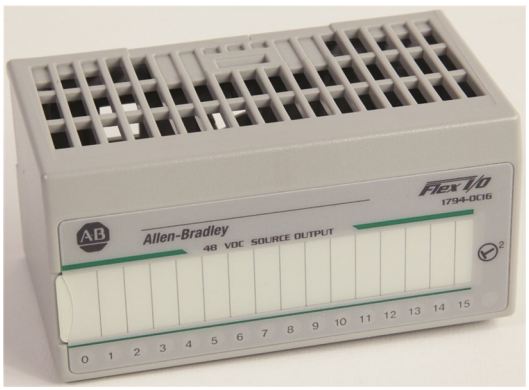

Representative Photo Only
(actual product may vary based on configuration selections)

Output Module, 24V DC, 8 Outputs, Electronically Protected

- Cover a wide electrical range
- Densities range from 8...32 points
- Isolated inputs or outputs, protected outputs, electronic fusing, or diagnostics available on some modules
- Removal and Insertion Under Power (RIUP) lets you replace modules and make cable connections while the system is in operation
- FLEX-I/O XT™ extreme environment modules are rated for -20...70 °C (-4....185 °F) and are compatible with the ControlLogix-XT™ extreme environment system. Contact NHP for further information.
- Each I/O module requires a terminal base for connection points for I/O wiring
- Wire directly from sensor to terminal base of the Flex™ I/O module and eliminate the terminal strip
- Conformally coated modules are available, please contact NHP for further details

SPECIFICATIONS	
Product Series	Flex I/O (Bul.1794)
Component Type Fieldbus I/O	Digital Output Module
Number of Digital Outputs	8 qty
Digital Output Type	24V DC Sourcing (NPN) type
Digital Output Range	19.2 ... 31.2V DC
Rated Current per Digital Output, Max	2 A max, per DO
Rated Current per Module, Max	10 A max, per module
Power Supply	24V DC
Module Specific Functions	No direct wiring to the I/O module, remove and insert modules under power is possible without disturbing other modules or systems
Operating Temperature, Max	55 °C max
Operating Temperature, Min	0 °C min

REFERENCES	
IECEx Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-