


8mm Eddy Current Sensor

Non-contact sensor designed for critical turbomachinery applications such as steam, gas and hydro turbines, compressors, gearboxes, pumps and fans to measure radial and axial shaft dynamic displacement; position, eccentricity and speed.



Performance	
Linear Measurement Range	2 mm (80 mils)
Initial Air Gap	0.5 mm (20 mils)
Incremental Scale Factor (ISF)	ISO: 8 V/mm (203.2 mV/mil) ± 5% @ temperature range 0 to 45°C (+32 to +113°F)
Deviation from best fit straight line (DSL)	± 0.025 mm (± 1 mil) @ temperature range 0 to 45°C (+32 to +113°F)
Measuring Target	
Minimum Shaft Diameter	25 mm (0.79")
Target Material (Ferromagnetic Steel)	42CrMo4 (AISI/SAE 4140) Standard Other (On Request)
Environmental, General	
Protection Class	IP66, IEC 60529
Operating Temperature Range	Sensor incl. 1m Cable: -35 to +180°C (-31 to 356°F) Cable & Connector: -35 to +150°C (-31 to 302°F)
Material	Sensor Tip (PEEK Polyether Ether Ketone), Case (Stainless Steel) Cable (PTFE Polytetrafluoroethylene), Connector (Brass, nickel-plated)
Weight (Sensor with 1m Cable)	Approx. 100 grams (3.53 oz)

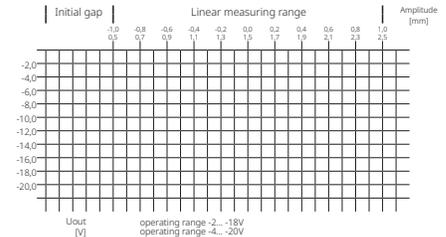


Compliance and Certifications	
CE	2014/30/EU (EN 61326-1) 2014/34/EU 2011/65/EU
ATEX	EN 60079-0 EN 60079-11
IEC-Ex	IEC 60079-0 IEC 60079-11 IEC 60079-26
CSA	CAN/CSA-C22.2 NO. 0-M91 CAN/CSA-C22.2 NO. 157-92 CAN/CSA-C22.2 NO. 213-M1987 CAN/CSA-E60079-15-02 (R2006) CAN/CSA-C22.2 NO. 25-1966 CAN/CSA-C22.2 NO. 61010-1-04 ANSI/UL Standard 913-2004 ANSI/UL Standard 1604-1995 UL 60079-15 2002 UL 61010-1


Hazardous Area Approvals

Intrinsic Safety (ia)	
ATEX / IEC-Ex / CSA	Area classification depends on converter, see converter documentation for details. Sensor temperature classification: T6: Ta ≤ 64°C T4: Ta ≤ 114°C T3: Ta ≤ 160°C
Non-sparking (nA)	
ATEX / IEC-Ex / CSA	Area classification depends on converter, see converter documentation for details. Sensor temperature classification: T6: Ta ≤ 64°C T4: Ta ≤ 114°C T3: Ta ≤ 160°C

Dimensions

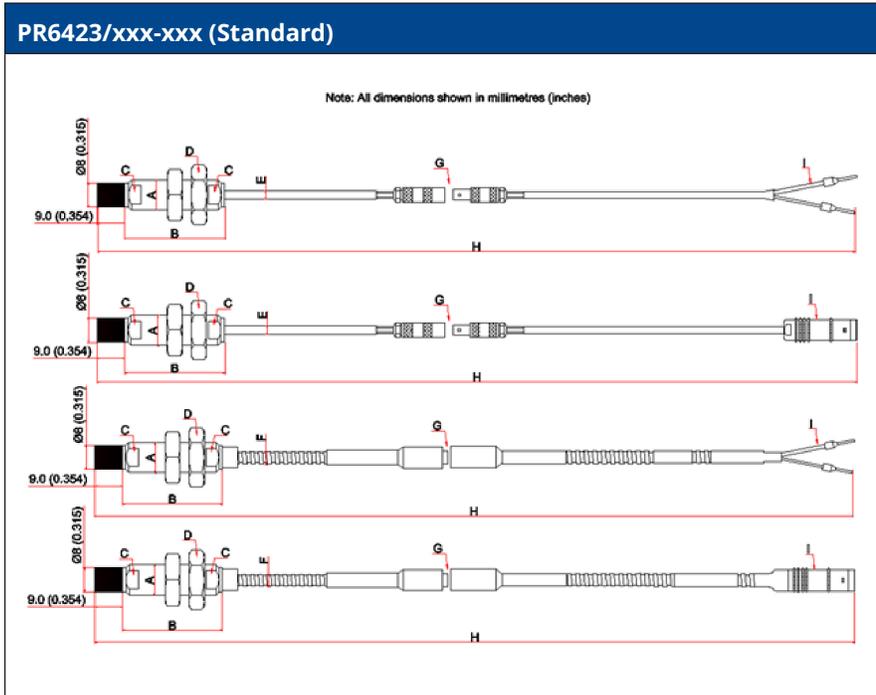

- A. Case thread, M10x1 or 3/8-24UNF
- B. SW 11 mm for M10 threads, SW 7/9-16 in for 3/8-24UNF threads
- C. Standard cable diameter 2.8 mm (0.110 in), minimum bending radius 25 mm (0.984 in)
- D. Armored cable diameter 6 mm (0.236 in), minimum bending radius 35 mm (1.378 in)
- E. Optional Adapter Plug after 1m cable from Sensor
- F. Cable Length (Tolerances 0... +10%)
- G. Lemo connector (male), 11.0 mm (0.433 in) diameter or open cable end

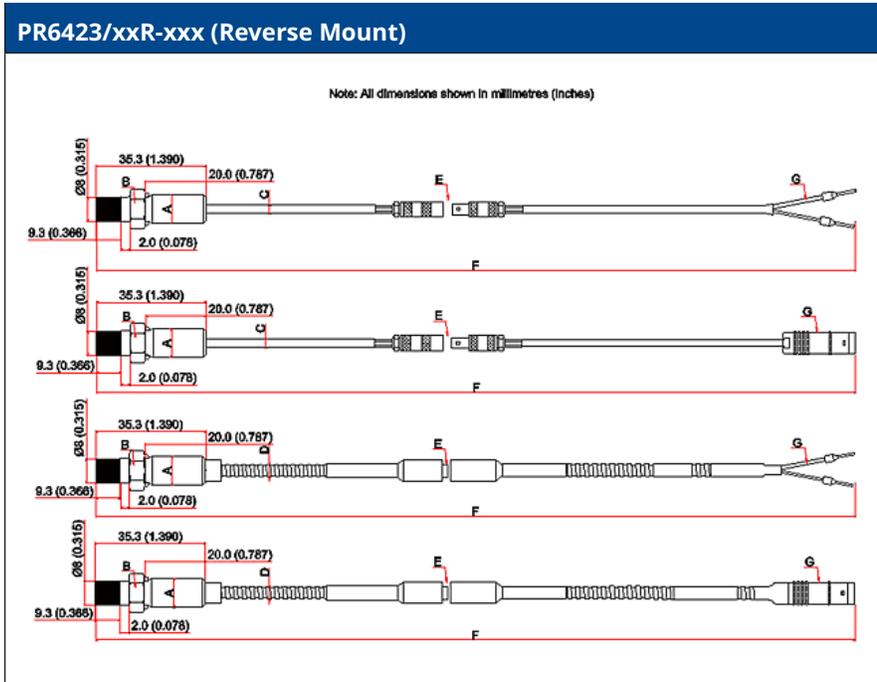

- A. Case thread, M10x1 or 3/8-24UNF
- B. SW 11 mm for M10 threads, SW 7/16 in for 3/8-24UNF threads
- C. Standard cable diameter 2.8 mm (0.110 in), minimum bending radius 25 mm (0.984 in)
- D. Armored cable diameter 6 mm (0.236 in), minimum bending radius 35 mm (1.378 in)
- E. Optional Adapter Plug after 1m cable from Sensor
- F. Cable Length (Tolerances 0... +10%)
- G. Lemo connector (male), 11.0 mm (0.433 in) diameter or open cable end